



EXPERT IN SPECIAL TYRE



GRANDNOVA
PROFESSIONAL SPECIAL TYRE MANUFACTURER



SOLIDNOVA®

PREMIUM SOLID TYRE



山东威进轮胎有限公司

SHANDONG GRANDNOVA TYRE CO.,LTD

统一社会信用代码China Unified Social Credit Code: 91370220MAD3LXNG5J

地址: 中国(山东)自由贸易试验区青岛片区前湾保税港区北京路45号东办公楼一楼2023-2439(A)

ADD: 2023-2439(A), First Floor, East Office Building, No.45, Beijing Road,
Qingdao Qianwan Bonded Port Area, China (Shandong) Pilot Free Trade Zone

网址Website: <http://www.grandnovatyre.com/>

联系人Contact: Mr. Mark Tai imexport2008@163.com chinagrandovaltyre@gmail.com

手机Business Mobile/WeChat/Whatsapp: +86 18753217071

联系人Contact: Ms. Dawn Tang chinagrandoval@163.com chinagrandoval@gmail.com

手机Business Mobile/WeChat/Whatsapp: +86 18505329633



PNEUMATIC & SOLID SPECIAL TYRES



2025-2026

Tyres Brochure >>>

山东威进轮胎有限公司

SHANDONG GRANDNOVA TYRE CO.,LTD



公司简介

山东威进轮胎有限公司是一家集生产、研发、销售及对外贸易为一体的公司，拥有一流的管理及技术服务队伍，公司主营产品为各种特种轮胎/非公路轮胎：包括各种实心轮胎（充气轮胎式、快装式、粘结式、压配式）、聚氨酯填充轮胎、高空作业平台轮胎、工程机械轮胎、港口和矿山机械轮胎、工业车辆轮胎等，旗下的主导品牌为GRANDNOVA、SOLIDNOVA、ROADNOVA、WEIJIN、PRIDESPEED。

公司引进世界最先进的轮胎设计和生产技术，符合美国TRA、欧洲ETRTO、日本JATMA、中国CCC标准；公司的生产体系已通过ISO9001认证；公司所生产的轮胎性能指标均达到国内和国际先进水平。

公司坚持“品质为基，服务为先”的发展战略，以新的视野和定位，打造资源节约型、环境友好型产品，不断追求卓越品质和技术创新。凭借优秀的品质和服务，产品已畅销欧美、中东、东南亚、非洲等100多个国家和地区。

本着“精诚合作，双赢并进”的原则，我们会再接再厉，与社会各界朋友携手共同造就企业的辉煌未来。

COMPANY PROFILE

SHANDONG GRANDNOVA TYRE CO.,LTD is a company integrating production, research and development, sales and foreign trade, with a first-class management and technical service team. The company's main products are a variety of special tires / off-the-road-tires: including kinds of Solid-Tires(for pneumatic tyre rim, for linde tyre rim, Pressed-On Solid Tires, Cured-On Solid Tires, Foam Filled Tires, for aerial work platform, etc), Material Handling Machinery Tires, Industrial Machinery Tires, Earthmoving &Construction Machinery Tires, Port&Mining Machinery Tires, etc. Its leading brands are: GRANDNOVA, SOLIDNOVA, ROADNOVA, PRIDESPEED, WEIJIN.

The company has introduced the world's most advanced tire design and production technology, met the U.S.TRA, Europe ETRTO, Japan JATMA, China CCC standards.The company's production system has passed ISO9001 certification. The company's tires performance indicators have reached the domestic and international advanced level.

The company adheres to the development strategy of "quality-based, service-first", with a new vision and positioning, to create resource-saving and environmentally friendly products, and constantly pursue excellent quality and technological innovation.With excellent quality and service, the products have sold well in Europe, America, the Middle East, Southeast East, Africa, Russia and other more than 100 countries and regions.

In line with the principle of "sincere cooperation, win-win development", we will make persistent efforts to work together with friends from all walks of life to create a brilliant future of the enterprise.



GRANDNOVA® 威进轮胎

MAIN PRODUCTS

- Solid Tyre for Forklift
- Solid Tyre for Kinds of Industrial Vehicles
- Press-On & Cured-On Solid Tyre
- Polyurethane Foam-Filled Tyre
- OTR Tyre for Earthmoving&Construction Vehicles
- OTR Tyre for Mining & Port Vehicles
- Pneumatic Tyre for Kinds of Material Handling & Industrial Vehicles



FORKLIFT SOLID TYRES

MANUFACTURERS OF SOLID TYRES

Aerial Platform Lifts

Loaders & Mining Equipment

Port Equipment Solid Tyres

Ground Support Equipment





MAXIMUM
VALUE &
ENHANCED
SAFETY

实心叉车轮胎 Solid Forklift Tire

GRANDNOVA TYRE 威进轮胎

GN001S

SPECIAL COMPOUNDS AVAILABLE

- NM

Non-Marking
- EC

Electrically Conductive
- HL

High Load
15% higher than standard
- CR

Cut Resistant
- SC

Chemical Resistant
(Scrubber)
- SQ

Standard & Quick
(Clip/Halo)

规格 Tire Size	轮辋 Rim Size	外直径 O.D. ±5mm	断面宽 S.W. ±5mm	最大负荷 Load Capacity/ Kg			
				@10km/h		@25km/h	
				Driving	Steering	Driving	Steering
3. 20-8	3. 00	317	112	470	360	390	300
4. 00-8	3. 00	402	118	1090	840	925	710
5. 00-8	3. 00	453	127	1255	965	1060	815
15x4. 5-8	3. 00	380	104	1005	775	850	655
16x6-8	4. 33	406	150	1545	1190	1305	1005
18x7-8	4. 33	447	170	2350	1880	2110	1585
18x9-8	7. 00	450	210	2845	2190	2410	1855
6. 00-9	4. 00	520	141	1975	1520	1675	1290
7. 00-9	4. 5/5. 0	550	156	2670	2055	2260	1740
21x8-9	6. 00	493	185	2810	2250	2530	1895
23x9-10	6. 50	585	212	3730	2870	3160	2430
6. 50-10	5. 00	570	160	2715	2090	2310	1775
200/50-10	6. 50	455	196	2910	2240	2470	1900
7. 00-12	5. 00	630	167	3105	2390	2635	2025
8. 25-12	5. 00	729	224	3425	2635	2905	2235
23x9-12	5. 00	580	208	3145	2420	2665	2050
23x10-12	8. 00	585	232	4450	3425	3770	2900
27x10-12	8. 00	665	244	4595	3535	3900	3000
250-15	7. 00/7. 50	686	232	4365	3490	3930	2955
300-15	8. 00	838	310	6895	5305	5850	4500
7. 00-15	5. 50	712	176	3690	2950	3135	2395

7. 50-15	6. 00	792	200	4145	3190	3510	2700
8. 25-15	6. 50	795	207	5085	3910	4310	3315
28x9-15 (8. 15-15)	7. 00	690	190	4090	3270	3675	2755
28x12. 5-15	9. 75	690	300	6200	4770	5260	4045
6. 50-16	5. 50	723	160	3545	2725	3005	2310
7. 50-16	6. 00	792	200	4400	3385	3730	2870
8. 00-16	5. 5	790	205	4070	3130	3450	2655
8. 25-16	6. 5	792	204	5080	3910	4310	3315
7. 50-20	6. 5	940	216	4650	3875	3940	3285
8. 25-20	6. 5	940	216	5165	4305	4380	3650
9. 00-20	7. 0	1005	235	6365	5305	5400	4500
10. 00-20	7. 5/8. 0	1070	240	7075	5895	6000	5000
11. 00-20	8. 0/8. 5	1060	275	7715	6430	6540	5450
12. 00-20	8. 5	1180	310	8920	7435	7560	6300
355/65-15	9. 75	826	372	7800	6000	6800	5000
355/50-20	10	847	367	8970	6900	7970	5900

GN002S

SPECIAL COMPOUNDS AVAILABLE

- NM

Non-Marking
- EC

Electrically Conductive
- HL

High Load
15% higher than standard
- CR

Cut Resistant
- SC

Chemical Resistant
(Scrubber)
- SQ


Standard & Quick
(Clip/Halo)

规格 Tire Size	轮辋 Rim Size	外直径 O.D. ±5mm	断面宽 S.W. ±5mm	最大负荷 Load Capacity/ Kg			
				@10km/h		@25km/h	
				Driving	Steering	Driving	Steering
3. 50-5	3. 00	302	101	610	580	515	490
4. 00-8	3. 00	402	118	1090	840	925	710
5. 00-8	3. 00	458	125	1255	965	1060	815
15x4. 5-8	3. 00	380	110	1005	775	850	655
16x6-8	4. 33	400	150	1545	1190	1305	1005
18x7-8	4. 33	452	148	2350	1880	2110	1585
6. 00-9	4. 00	521	151	1975	1520	1675	1295
140/55-9	4. 00	384	135	1380	1060	1170	900
21x8-9	6. 00	527	191	2890	2225	2455	1895
6. 50-10	5. 00	572	158	2715	2090	2310	1780
200/50-10	6. 50	444	172	2910	2240	2470	1900
23x9-10	6. 50	585	213	3730	2870	3160	2430
23x10-12	8. 00	580	222	4005	3205	3605	2705
27x10-12	8. 00	665	230	4465	3270	4020	3015
7. 00-12	5. 00	645	172	3105	2390	2635	2025
28x9-15 (8. 15-15)	7. 00	673	212	4060	3125	3445	2650
28x12. 5-15	9. 75	704	310	5660	5430	5260	4960
8. 25-15	6. 50	795	207	5085	3910	4310	3315
300-15	8. 00	815	246	6895	5305	5850	4500
9. 00-16	6. 5	858	220	5290	4070	4485	3450
355/55-20	10. 00	822	322	10120	8150	8970	6900

8. 00-20	7. 0	910	220	6450	5160	5805	4355
8. 25-20	6. 5/7. 0/7. 5	948	223	5165	4305	4380	3650
9. 00-20	6. 5/7. 0/7. 5	1008	237	6365	5305	5400	4500
10. 00-20	7. 5/8. 0/8. 5	1060	262	7300	6085	6200	5165
11. 00-20	7. 5/8. 0/8. 5	1063	263	7715	6430	6540	5450
12. 00-20	8. 0/8. 5	1088	285	8920	7435	7560	6300
14. 00-20	10. 00	1370	380	10620	9950	9860	8215
12. 00-24	8. 50/10. 0	1208	330	8335	7960	6945	6540
13. 00-24	10. 00	1340	350	12165	10135	10135	8595
14. 00-24 eco	10. 00	1340	350	12165	10135	10135	8595
14. 00-25	10. 00	1340	360	12010	9980	10160	8440

GN003S


SPECIAL COMPOUNDS AVAILABLE



规格 Tire Size	轮辋 Rim Size	外直径 O.D. ±5mm	断面宽 S.W. ±5mm	最大负荷 Load Capacity/ Kg			
				@10km/h		@25km/h	
				Driving	Steering	Driving	Steering
18x7-8	4. 33	462	157	2350	1880	2110	1585
6. 00-9	4. 00	522	150	1975	1520	1675	1295
200/50-10	6. 50	462	194	2910	2240	2470	1900
6. 50-10	5. 00	571	160	2715	2090	2310	1775
23x9-10	6. 50	580	212	3730	2870	3160	2430
7. 00-12	5. 00	644	178	3105	2390	2635	2025
28x9-15 (8. 15-15)	7. 00	681	216	4060	3125	3445	2650
8. 25-15	6. 50	795	211	5085	3910	4310	3315
300-15	8. 00	838	310	6895	5305	5850	4500
7. 50-16	6. 00	788	204	4770	3670	4045	3110
8. 25-16	6. 50	817	211	4940	3950	4440	3330

GN004S

SPECIAL COMPOUNDS AVAILABLE




规格 Tire Size	轮辋 Rim Size	外直径 O.D. ±5mm	断面宽 S.W. ±5mm	最大负荷 Load Capacity/ Kg			
				@10km/h		@25km/h	
				Driving	Steering	Driving	Steering
15x4. 5-8	3. 00	380	110	1005	775	850	655
16x6-8	4. 33	400	150	1545	1190	1305	1005
18x7-8	4. 33	462	172	2350	1880	2110	1585
5. 00-8	3. 00	460	127	1255	965	1060	815

6. 00-9	4. 00	529	140	1975	1520	1675	1290
21x8-9	6. 00	524	194	2890	2225	2455	1890
23x9-10	6. 50	585	214	3730	2870	3160	2430
6. 50-10	5. 00	565	165	2715	2090	2310	1775
200/50-10	6. 50	462	194	2910	2240	2470	1900
7. 00-12	5. 00	663	174	3105	2390	2635	2025
7. 50-15	5. 50	755	189	3805	2925	3225	2480
28x9-15 (8. 15-15)	7. 00	685	206	4060	3125	3445	2650
8. 25-15	6. 50	787	209	5085	3910	4310	3315
250-15	7. 00/7. 50	686	232	4365	3490	3930	2955
300-15	8. 00	815	241	6895	5305	5850	4500
9. 00-16	6. 50	868	232	4480	3445	3795	2920
8. 00-20	6. 50/7. 00	898	213	5153	4245	4325	3570
8. 25-20	6. 50/7. 00/7. 50	936	225	5335	4445	4525	3770

GN005S

SPECIAL COMPOUNDS AVAILABLE



规格 Tire Size	轮辋 Rim Size	外直径 O.D. ±5mm	断面宽 S.W. ±5mm	最大负荷 Load Capacity/ Kg			
				@10km/h		@25km/h	
				Driving	Steering	Driving	Steering
15x4. 5-8	3. 00	380	108	905	725	805	605
5. 00-8	3. 00	455	115	1210	970	1095	820
16x6-8	4. 33	405	140	1500	1200	1345	1010
18x7-8 (180/70-8)	4. 33	461	170	2350	1880	2110	1585
6. 00-9	4. 00	520	130	1920	1535	1730	1295
140/55-9	4. 00	380	112	1060	1000	900	850
21x8-9	6. 00	520	190	2810	2250	2530	1895
18x7-10	4. 50/5. 00	460	170	3180	2550	2465	1880
6. 50-10	5. 00	560	145	2715	2090	2310	1775
200/50-10	6. 50	440	165	2910	2240	2470	1900
7. 00-12	5. 00	635	172	3015	2410	2635	2025
23x12-12 (315/45-12)	10. 00	575	252	4840	3360	4650	3950
28x9-15 (8. 15-15)	7. 00	690	190	4060	3125	3445	2650
28x12. 5-15 (355/50-15)	9. 75	690	295	5890	5350	5525	4250
8. 25-15	6. 50	810	200	4940	3950	4440	3330
300-15	8. 00	790	240	5990	4790	5380	4035



GN006S

SPECIAL COMPOUNDS AVAILABLE

- NM

Non-Marking
- EC

Electrically Conductive
- HL

High Load
15% higher than standard
- CR

Cut Resistant
- SC

Chemical Resistant
(Scrubber)
- SQ

Standard& Quick
(Clip/Halo)



规格 Tire Size	轮辋 Rim Size	外直径 O.D. ±5mm	断面宽 S.W. ±5mm	最大负荷 Load Capacity/ Kg			
				@10km/h		@25km/h	
				Driving	Steering	Driving	Steering
15x4. 5-8	3. 00	370	109	905	725	805	605
15x6. 5-8	5. 00	377	165	1010	820	910	670
4. 00-8	3. 00	400	111	1055	845	950	715
5. 00-8	3. 00	455	125	1210	970	1095	820
16x6-8	4. 33	404	147	1500	1200	1345	1010
18x7-8	4. 33	440	155	2350	1880	2110	1585
6. 00-9	4. 00	515	143	1920	1535	1730	1295
7. 00-9	5. 00	536	157	2370	2015	2370	1750
21x8-9	6. 00	505	192	2810	2250	2530	1895
140/55-9	4. 00	374	130	1380	1060	1170	900
200/50-10	6. 50	441	187	2370	1900	2135	1605
23x9-10	6. 50	561	191	4005	3205	3605	2705
6. 50-10	5. 00	566	153	2840	2110	2370	1780
23x10-12	8. 00	585	227	3980	3420	3586	3010
7. 00-12	5. 00	643	176	3015	2410	2710	2035
27x10-12	8. 00	661	232	4465	3570	4020	3015
8. 25-12	5. 00	696	189	3326	2660	2995	2245
28x9-15 (8. 15-15)	7. 00	690	208	4090	3270	3670	2755
250-15	7. 50/8. 00	693	228	4365	3490	3930	2955
300-15	8. 00	788	238	5900	4700	5380	4037
7. 00-15	5. 50	712	187	3590	2870	3190	2395
7. 50-15	5. 50	752	189	3690	2950	3225	2420
8. 25-15	6. 50	810	205	4940	3950	4440	3330
355/65-15	9. 75	822	316	8800	8000	7800	6000
355/50-20	10. 00	820	318	9970	7900	8970	6900
8. 25-20	6. 5/7. 0	933	212	5425	4340	4880	3735
9. 00-20	6. 5/7. 0	948	222	6450	5460	5805	4355
10. 00-20	7. 5/8. 0	1038	264	7240	5795	6610	4885
11. 00-20	7. 5/8. 0	1038	264	7560	6050	6810	5120
12. 00-20	8. 0/8. 5	1086	282	8800	7000	8000	6450
36x12. 5-20	9. 00	928	326	7230	6665	6435	5900
40x12. 5-20	9. 00	970	315	8270	7700	7355	7000

GN007S

SPECIAL COMPOUNDS AVAILABLE

- NM

Non-Marking
- EC

Electrically Conductive
- HL

High Load
15% higher than standard
- CR

Cut Resistant
- SC

Chemical Resistant
(Scrubber)
- SQ

Standard& Quick
(Clip/Halo)



规格 Tire Size	轮辋 Rim Size	外直径 O.D. ±5mm	断面宽 S.W. ±5mm	最大负荷 Load Capacity/ Kg			
				@10km/h		@25km/h	
				Driving	Steering	Driving	Steering
18x7-8	4. 33	461	164	2350	1880	2110	1585
18x7-10	5. 00	460	170	3180	2550	2465	1880
200/50-10	6. 50	462	196	2910	2240	2470	1900

GN014S

SPECIAL COMPOUNDS AVAILABLE

- NM

Non-Marking
- EC

Electrically Conductive
- HL

High Load
15% higher than standard
- CR

Cut Resistant
- SC

Chemical Resistant
(Scrubber)
- SQ

Standard& Quick
(Clip/Halo)



规格 Tire Size	轮辋 Rim Size	外直径 O.D. ±5mm	断面宽 S.W. ±5mm	最大负荷 Load Capacity/ Kg			
				@10km/h		@25km/h	
				Driving	Steering	Driving	Steering
2. 50-4	1. 7	216	61	360	360	200	200
200x8	2. 5	305	100	550	440	400	320
6. 00-9	4. 00	520	141	1975	1520	1675	1290
6. 50-10	5. 00	580	174	2715	2090	2310	1775
26x9-15	7. 00	640	190	4000	3100	3370	2550
28x9-15 (8. 15-15)	7. 00	722	233	4060	3125	3445	2650
250-15	7. 00	722	233	5220	4015	4425	3405
355/50-20	10. 00	822	322	10120	8150	8970	6900
10. 00-20	7. 5/8. 0	1016	230	7150	6035	6100	5080
11. 00-20	7. 5/8. 0	1053	270	7850	6820	6650	5550
31x10-20 (10-16. 5)	7. 0	765	250	3950	2845	3420	2375
33x12-20 (12-16. 5)	8. 0	820	280	4400	3660	3530	3190
20. 5-25	17. 00/2. 0	1490	520	15000	11500	13000	8750





滑移式车辆实心轮胎 Skid Steer Loader Solid Tire



高空作业车辆实心轮胎 Boom Lift Solid Tire

SKS-TR

SPECIAL COMPOUNDS AVAILABLE

- NM

Non-Marking
- EC

Electrically Conductive
- HL

High Load
15% higher than standard
- CR

Cut Resistant
- SC

Chemical Resistant (Scrubber)



规格 Tire Size	轮辋 Rim Size	外直径 O.D. ±5mm	断面宽 S.W. ±5mm	最大负荷 Load Capacity/ Kg			
				@10km/h		@25km/h	
				Driving	Steering	Driving	Steering
5. 70-12	4. 00	570	155	-	1700	-	1300
23x8. 5-12	5. 00	575	190	-	2150	-	1700
27x8. 5-15	5. 50	675	200	-	2300	-	2100
27x10-15	7. 0	675	245	-	2600	-	2450
27x12-15	8. 5	675	280	5955	4580	5050	3880
7. 50-16	6. 0	750	200	-	-	-	2200
8. 25-16	6. 0	825	200	5230	-	-	-
26x12-16	8. 00	660	304	5435	-	-	-
30x10-16 (10-16. 5)	6. 0-16	746	238	3950	2845	3420	2375
30x11-16 (10-16. 5)	6. 0-16	756	250	-	2995	-	2350
31x10-16 (10-16. 5)	6. 0-16	782	228	4326	3245	3335	2500
31x10-16 (10-16. 5)	6. 0-16	782	252	4520	3450	3530	2700
31x11-16 (12-16. 5)	6. 0-16	800	260	-	3085	-	2450
31x12-16 (10-16. 5)	6. 0-16	800	265	-	-	-	2500
33x12-16	8. 0	832	285	6500	4870	5370	4035
16/70-16	6. 5	850	250	5450	-	-	-
16/70-16	6. 5	880	290	5625	-	-	-
16/70-16	10. 0	870	280	9240	7040	8184	5984
20. 5/70-16	6. 5	800	200	3000	-	-	-
31x10. 5-18 (10-16. 5)	7. 0-18	807	235	-	-	-	2400
32x21-18	18. 0-20	820	530	15460	12370	9715	7680

16/70-16	6. 5	850	250	5450	-	-	-
16/70-16	6. 5	880	290	5625	-	-	-
16/70-16	10. 0	870	280	9240	7040	8184	5984
20. 5/70-16	6. 5	800	200	3000	-	-	-
31x10. 5-18 (10-16. 5)	7. 0-18	807	235	-	-	-	2400
32x21-18	18. 0-20	820	530	15460	12370	9715	7680
16/70-20	8. 5	918	335	7625	5865	6175	4750
16/70-20	10. 0	1060	360	8600	-	-	-
810x182-20	6. 5-20	808	180	3910	3130	3520	2640
880x280-20	8. 5-20	875	280	5660	4350	4800	3690
31x11-20 (12-16. 5)	7. 0-20	800	260	-	3085	-	2450
31x10. 5-20 (10-16. 5)	7. 0-20	807	235	-	-	-	2400
30x10-20 (10-16. 5)	7. 0-20	756	236	-	2995	-	2200
31x8. 5-20 (10-16. 5)	6. 5	800	200	-	-	-	2400
31x10-20 (10-16. 5)	7. 0	782	226	3860	3010	2975	2235
31x10-20 (10-16. 5)	7. 5	800	280	4125	3275	3240	2500
31x12-20 (10-16. 5)	8. 0	800	336	-	-	-	2600
33x12-20 (12-16. 5)	7. 5-20	840	276	5560	4170	4590	3450
33x12-20 (12-16. 5)	8. 0-20	840	276	5929	4440	4900	3680
33x15. 5-20	12. 0-20	812	386	9690	7720	6380	5085
36x12-20	8. 5	918	275	5955	4580	5050	3880
36x12-20	8. 5	918	305	7295	5520	5975	4550
36x14-20 (14-17. 5)	7. 5	918	323	6710	5160	5435	4180
36x14-20 (14-17. 5)	8. 0	940	320	-	4800	-	4000
36x14-20 (14-17. 5)	8. 5	918	335	7625	5865	6175	4750
36x14-20 (14-17. 5)	10. 0	918	335	8920	6860	7220	5560
36x16-20 (14-17. 5)	8. 5	940	350	-	5252	-	4200
36. 5x12-20 (14-17. 5)	8. 0	930	300	-	-	-	3600
36. 5x14-20 (14-17. 5) (355/70D17. 5)	11. 0	930	350	-	-	-	3800
15. 00-20 (14-17. 5) (355/70D17. 5)	11. 0	930	350	-	-	-	3800
15. 00-20 (15-19. 5)	11. 0	945	360	8300	-	-	4450
15. 00-20	8. 5	970	370	9500	7500	6500	4500
38. 5x14-20 (14-17. 5) (385/65D19. 5)	11. 0	970	342	-	-	-	4128
315/55-20 (315x55D20)	7. 5-20	820	315	5315	-	-	-
20. 5/70-20	6. 5	880	290	-	-	-	2700
18. 00-20	14. 0	945	450	-	-	-	6800
41x11. 5-24	8. 5	1040	333	9240	7040	8185	5985
36x14-24	8. 5	918	335	6030	4630	4880	3710
16/70-24	8. 5-24	1010	300	-	-	-	5900
16/70-24	10. 0-24	1060	360	10000	7400	8650	6400
16/70-24	12. 0-24	1150	430	11000	8850	8855	6850
16/70-24	13. 00-24	1140	423	12920	10075	9425	7825
355/55-24 (355x55D625)	8. 5-24	910	355	5995	-	-	-
385/65-24 (15-22. 5) (385/65D22. 5)	10. 00-24	1062	356	10900	8300	9550	7365
385/65-24	11. 75-24	1014	360	11550	8800	8900	6800
445/65-24	11. 75-24	1102	440	11240	9000	9005	6870
445/65-24 (18-22. 5) (445/65D22. 5)	12. 00-24	1152	428	11950	9565	10206	8840
15-24 (15D625)	10. 0-24	990	380	7250	-	-	-
18-24 (18D625)	10. 0-24	1015	380	7450	-	-	-
13. 00-24	8. 5-24	1280	325	10500	9000	9000	7000
14. 00-24	8. 5/10. 0-24	1340	340	12165	10135	10135	8120
1000x300-24	8. 5-24	1000	300	7715	-	-	-

EXCELLENT HEAT RESISTANCE
& ABRASION RESISTANCE
+ GOOD DRAWING PERFORMANCE

实心工程轮胎 Solid OTR Tire

GRANDNOVA TYRE 威进轮胎



GN015S

GN016S

GN017S

规格 Tire Size	轮辋 Rim Size	花纹 Pattern	外直径 O.D. ±5mm	断面宽 S.W. ±5mm	最大负荷 Load Capacity/ Kg			
					@10km/h		@25km/h	
					Driving	Steering	Driving	Steering
5. 50/6. 00-15	4. 5-15	GN016S	653	151	2830	2095	2455	1820
14. 00-20	10. 0-20	GN016S	1220	321	10800	8640	9730	7315
14. 00-24	10. 0-24	GN016S	1510	470	12760	10210	11460	8595
1100/45-25	14. 00/1. 5-25	GN016S	1130	420	16870	13750	10020	7365
16. 00-25	11. 25/2. 0-25	GN016S	1390	390	16500	13000	13100	10100
16. 00-25	11. 25/2. 0-25	GN016S	1510	470	18500	15000	15200	12650
18. 00-25	13. 00/2. 5-25	GN015S	1600	500	17000	-	-	-
18. 00-25	13. 00/2. 5-25	GN016S	1600	435	19000	14500	16500	12050
18. 00-25	13. 00/2. 5-25	GN016S	1750	508	21000	16500	18500	13000
17. 5-25	14. 00/1. 5-25	GN015S	1370	458	17140	13855	10420	7890
17. 5-25	14. 00/1. 5-25	GN016S	1335	420	16870	13750	10020	7365
17. 5-25	14. 00/1. 5-25	GN017S	1310	420	13000	10500	8250	6300
20. 5-25	17. 00/2. 0-25	GN015S	1455	500	20875	15620	13320	10587
20. 5-25	17. 00/2. 0-25	GN016S	1420	470	20875	15620	13320	10587
20. 5-25	17. 00/2. 0-25	GN016S	1505	535	24510	19600	14380	11070
21. 00-25	15. 00/3. 0-25	GN016S	1750	550	25700	21200	18040	13530
23. 5-25	19. 50/2. 5-25	GN015S	1630	590	30010	24010	17380	13050
23. 5-25	19. 50/2. 5-25	GN016S	1565	560	30010	24010	17380	13050
23. 5-25	19. 50/2. 5-25	GN017S	1585	580	19600	13600	14280	10350
26. 5-25	22. 00/3. 0-25	GN015S	1720	642	38350	30640	22170	16650
26. 5-25	22. 00/3. 0-25	GN016S	1685	625	38350	30640	22170	16650
26. 5-25	22. 00/3. 0-25	GN016S	1750	650	38350	30640	22170	16650
29. 5-25	25. 00/3. 5-25	GN015S	1850	740	47100	36900	27350	20500
29. 5-25	25. 00/3. 5-25	GN016S	1840	700	47100	36900	27350	20500
29. 5-25	25. 00/3. 5-25	GN016S	1845	740	47100	36900	27350	20500
18. 00-33	13. 00/2. 5-33	GN016S	1842	485	21220	17610	12715	9345

机场设备用实心轮胎 Airport Equipments Solid Tire

机场拖车实心轮胎 Airport Trailer Solid Tire

清扫车实心轮胎 Cleaning Machines Solid Tire

GN009S

SPECIAL COMPOUNDS AVAILABLE

- NM Non-Marking
- EC Electrically Conductive
- HL High Load 15% higher than standard
- CR Cut Resistant
- SC Chemical Resistant (Scrubber)

规格 Tire Size	轮辋 Rim Size	花纹 Pattern	外直径 O.D. ±5mm	断面宽 S.W. ±5mm	最大负荷 Load Capacity/ Kg			
					@10km/h		@25km/h	
					Driving	Steering	Driving	Steering
3. 00-4	2. 50-4	GN006S	249	76	195	150	175	140
3. 00-5	2. 15-5	GN006S	249	76	195	150	175	140
3. 00-5	2. 15-5	GN009S	249	76	195	150	175	140
3. 50-5	3. 00-5	GN009S	288	88	780	585	670	515
250x80	2. 50-6	GN006S	250	80	195	150	175	140
3. 50-6	3. 00-6	GN006S	300	98	805	620	730	580
3. 50-6	3. 00-6	GN009S	300	98	805	620	730	580
300x100	2. 75-8	GN006S	302	98	520	435	500	415
350x100	3. 00-8	TR	347	99	700	580	635	550
360x105	3. 00-8	GN009S	360	105	710	590	645	560
3. 20-8	3. 00/3. 75	GN009S			470	360	390	300
3. 60-8	3. 00-8	GN009S			480	380	410	320
4. 00-8	2. 50-8	GN009S	408	100	910	700	765	590
4. 00-8	3. 00-8	GN009S	408	100	1090	840	925	710
4. 00-8	3. 75-8	GN006S	408	100	1175	905	1000	770
5. 00-8	3. 75-8	GN005S	452	127	1325	1020	1200	1020
14x4. 5-8	3. 00-8	GN009S			805	630	705	520
320x150	4. 00-8	GN009S	320	150	1395	1050	1252	1025
16x5-9	3. 50-9	GN009S	402	125	1394	1010	1181	845
16x5-9	4. 00-9	GN009S	402	125	1530	1110	1300	930
26x9-15	7. 00-15	GN009S			3885	3050	3440	2535
1100x330-20	11. 0-20	GN009S	1085	335	13450	10760	11300	8700
1100x420-24	12. 0-20	GN009S	1085	420	11270	8900	9580	7185



剪叉式升降平台实心轮胎 Scissor Type Lifting Platform Solid Tire



SL1 SL2 SL3 SL4 SL5 SL6 SL7 SL8 SM

规格(英制) Tire Size (Inch)	规格(公制) (Metric Size)	花纹 Pattern	外直径 O.D. ±5mm	断面宽 S.W. ±5mm	最大负荷 Load Capacity/ Kg		
					@10km/h		@16km/h
					Driving	Steering	
9x3	230x76	SL3	230	75	400	345	280
9x3. 15	230x80	SL1/SL3/SL6/SL8	230	80	400	345	280
9x4	230x100	SL1/SL3/SL6/SL8	230	100	510	455	390
10x3	254x76	SL1/SL3/SL5/SL6	254	76	540	485	420
10x3. 15	250x80	SL1/SL3/SL8	250	80	440	385	320
10X4	254x100	SL5/SM	250	100	660	560	515
11x3	280x76	SL5	280	76	600	530	460
11x4	280x100	SL5	280	100	840	740	645
11. 25x5. 5	285x135	SM	285	135	790	690	590
300x80	300x80	SM	300	80	655	585	450
12x3x10	305/76-254	SL7	305	76	650	480	500
12x4 (200x8)	305x100	SL1/SL2/SL3/SL4/SL6/SM	305	100	820	730	630
12x4x10	305/100-254	SL7	305	100	820	730	630
12x4 1/8x10	305x105x254	SM	305	105	835	745	645
12x4. 5	305x114x237	SL1/SL3/SL6	305	114	970	865	745
12 3/8 x 4	310x100x250	SL6	310	100	850	620	655
12. 5x4. 25	317x107x246	SL1/SL3	317	107	1100	990	855
12 3/4x4	323x100	SL1/SL3/SL4/SL5/SL6	323	100	850	750	675
14x4. 5	356x115	SL1/SL2/SL3/SL5	356	115	1085	965	835
370x105	370x105	SL6	370	105	1155	1015	885
15x5	381x127	SL1/SL2/SL3/SL4/SL5/SL6/SM	381	127	1290	1150	995
15 3/4 x 4 3/4	400x120x298	SL6	400	120	1350	985	1040
16x5	406x127	SL1/SL2/SL3/SL4/SL5/SL8	406	127	1400	1020	1080
16x6	406x152	SL1	406	152	1680	1220	1295
4. 00-8	408x115	SL5	408	115	1055	845	730
18x7	457x178	SL1	457	178	2310	2065	1590
22x6x16	559x152x406. 4	SL1	559	152	2265	2015	1740
22x6x17 3/4	559x152x450. 8	SL1	559	152	2185	1945	1680
22x7x17 3/4	559x178x450. 8	SL1/SL6/SM	559	178	4220	3715	3250
22x9x16	559x229x406. 4	SL1	559	229	3180	2715	2170
23x10x16	584x254x406. 4	SL1	584	254	3870	3115	2640
23. 6x7. 5	600x190	SL1/SL3/SL5/SKS-TR	600	190	3360	2705	1875
25x7	640x170x560	SL2	640	170	2525	2250	1905
25. 6x7	650x181	SL5	650	181	2500	2225	1830



植保机和插秧机实心轮胎
Plant Protection Machine and Rice Transplanter Solid Tire



规格 Tire Size	外直径 O.D.	断面宽 S.W.
600mmX80mm	600mm	80mm
822mmX80mm	822mm	80mm
970mmX80mm	970mm	80mm
1100mmX80mm	1100mm	80mm
1200mmX80mm	1200mm	80mm
1400mmX80mm	1400mm	80mm
1600mmX80mm	1600mm	80mm
1300mmX100mm	1300mm	100mm
1600mmx100mm	1600mm	100mm
1800mmx100mm	1800mm	100mm



压配式/粘结式实心轮胎 Press-On / Cured-On Solid Tire

SPECIAL COMPOUNDS AVAILABLE

- NM

Non-Marking
- EC

Electrically Conductive
- HL

High Load
15% higher than standard
- CR

Cut Resistant
- SC

Chemical Resistant (Scrubber)

TR

SM



规 格 (英制) Tire Size (Inch)	规 格 (公制) Metric Size (mm)	花 纹 Pattern	最大负荷 Maximum Load (KG)				
			平衡重式叉车 Counterbalanced Forklift				其他工业车辆 Other Industrial Vehicles @16km/h
			@10km/h		@16km/h		
			驱动轮 Driving	转向轮 Steering	驱动轮 Driving	转向轮 Steering	
61/4X31/8X23/4	158X80X72	SM	340	310	295	270	255
8X7X51/2	200X180X140	SM/TR	950	850	870	775	675
8X102/3X51/2	200X270X140	SM/TR	1510	1350	1330	1190	1040
9X5X5	229X127X127	SM/TR	890	790	785	715	685
10X5X6	254X127X157	SM/TR	955	850	845	770	735
10X3X61/4	254X76X159	SM/TR	500	445	440	400	385
10X4X61/4	254X102X159	SM/TR	725	645	640	585	560
10X5X61/4	254X127X159	SM/TR	955	850	845	765	735
10X6X61/4	254X152X159	SM/TR	1180	1050	1045	950	910
10X7X61/4	254X178X159	SM/TR	1410	1255	1245	1130	1085
10X4X61/2	254X102X165	SM/TR	720	640	635	580	555
10X43/4X61/2	254X121X165	SM/TR	885	790	785	710	680
10X5X61/2	254X127X165	SM/TR	940	835	830	755	725
10X6X61/2	254X152X165	SM/TR	1160	1035	1030	935	895
101/2X5X5	267X127X127	SM/TR	1020	910	905	820	785
101/2X6X5	267X152X127	SM/TR	1295	1155	1145	1040	995
101/2X7X5	267X178X127	SM/TR	1550	1375	1375	1220	1195
101/2X4X61/2	267X102X165	SM/TR	755	675	670	610	580
101/2X5X61/2	267X127X165	SM/TR	1000	890	885	805	770
101/2X6X61/2	267X152X165	SM/TR	1240	1105	1100	995	955
101/2X7X61/2	267X178X165	SM/TR	1485	1320	1310	1190	1140
102/3X102/3X81/4	270X270X210	SM/TR	1890	1690	1680	1500	1300
102/3X31/2X9	270X90X230	SM/TR	565	505	500	445	390
102/3X82/3X9	270X220X230	SM/TR	1520	1360	1350	1205	1050
102/3X102/3X9	270X270X230	SM/TR	1890	1690	1680	1500	1300
11X4X61/2	279X102X165	SM/TR	785	700	695	630	605
111/2X122/5X10	290X315X250	SM/TR	2340	2090	2070	1850	1610
12X31/2X8	305X89X203	SM/TR	700	625	620	565	540
12X41/2X8	305X114X203	SM/TR	970	865	860	780	745
12X51/2X8	305X140X203	SM/TR	1240	1100	1095	995	950
12X61/2X8	305X165X203	SM/TR	1505	1340	1330	1210	1160
12X4X8	305X102X203	SM/TR	835	745	740	670	645
12X5X8	305X127X203	SM/TR	1105	980	975	885	850
12X5X9	318X127X228	SM/TR	1110	990	985	895	855
121/2X41/3X10	320X110X250	SM/TR	805	720	715	640	560
13X31/2X8	330X89X203	SM/TR	730	650	645	585	560
13X41/2X8	330X114X203	SM/TR	1040	925	920	835	800
13X51/2X8	330X140X203	SM/TR	1235	1125	1115	1040	995
13X5X8	330X127X203	SM/TR	1195	1065	1060	960	920
13X5X10	330X127X254	SM/TR	1105	985	980	890	850
131/2X31/2X8	343X89X203	SM/TR	735	655	650	590	565
131/2X41/2X8	343X114X203	SM/TR	1065	950	945	855	820
131/2X51/2X8	343X140X203	SM/TR	1400	1245	1235	1125	1075
131/2X61/2X8	343X165X203	SM/TR	1730	1540	1530	1390	1330
131/2X71/2X8	343X191X203	SM/TR	2060	1755	1745	1605	1535
131/2X81/2X8	343X216X203	SM/TR	2445	2010	1955	1805	1720
131/2X91/3X11	340X236X282	SM/TR	1950	1740	1725	1540	1340
131/2X12X11	343X300X280	SM	1570	1375	1490	1370	1185
14X41/2X8	356X114X203	SM/TR	1085	965	960	870	835
14X5X8	356X127X203	SM/TR	1185	1065	1060	970	935
14X5X10	356X127X254	SM/TR	1240	1100	1095	995	955
14X8X10	356X203X254	SM/TR	2375	2120	2100	1875	1630

规 格(英制) Tire Size (Inch)	规 格(公制) Metric Size (mm)	花 纹 Pattern	最大负荷 Maximum Load (KG)				
			平衡重式叉车 Counterbalanced Forklift				其他工业车辆 Other Industrial Vehicles @16km/h
			@10km/h		@16km/h		
			驱动轮 Driving	转向轮 Steering	驱动轮 Driving	转向轮 Steering	
14 ₁ /5X5 ₁ /2X11 ₄ /5	360X140X300	SM/TR	1190	1065	1055	945	820
14 ₁ /5X7 ₂ /3X11 ₄ /5	360X195X300	SM/TR	1660	1480	1465	1310	1140
14 ₁ /5X8 ₂ /3X11 ₄ /5	360X220X300	SM/TR	1890	1685	1670	1490	1300
14 ₁ /5X9 ₁ /3X11 ₄ /5	360X238X300	SM/TR	2050	1830	1815	1620	1410
14 ₁ /5X10X11 ₄ /5	360X250X300	SM/TR	2160	1930	1915	1710	1485
14 ₁ /5X10 ₂ /3X11 ₄ /5	360X270X300	SM/TR	2345	2095	2075	1855	1610
14 ₁ /5X11 ₄ /5X11 ₄ /5	360X300X300	SM/TR	2620	2340	2320	2070	1800
14 ₁ /5X13X11 ₄ /5	360X327X300	SM/TR	2870	2560	2535	2265	1970
14 ₁ /2X5X12 ₁ /5	368X127X310	SM/TR	1050	940	935	835	725
15X3 ₁ /2X11 ₁ /4	381X89X286	SM/TR	830	740	735	665	640
15X4X11 ₁ /4	381X102X286	TR	985	875	870	790	755
15X5X11 ₁ /4	381X127X286	SM/TR	1290	1150	1145	1040	995
15X6X11 ₁ /4	381X152X286	SM/TR	1600	1425	1415	1285	1230
15X7X11 ₁ /4	381X178X286	SM/TR	1910	1700	1690	1535	1470
15X8X11 ₁ /4	381X203X286	SM/TR	2215	1975	1960	1780	1705
15X9X11 ₁ /4	381X229X286	SM/TR	2355	3165	2170	1955	1950
15 ₁ /2X5X10	394X127X254	SM/TR	1365	1215	1210	1100	1050
15 ₁ /2X6X10	394X152X254	SM/TR	1735	1545	1535	1395	1335
15 ₃ /4X11 ₄ /5X13	400X300X330	SM/TR	2790	2500	2475	2210	1920
15 ₃ /4X7X13 ₁ /3	400X180X340	SM/TR	1645	1470	1460	1305	1130
15 ₃ /4X8 ₃ /4X14 ₁ /8	400X220X360	SM/TR	2540	2255	2240	2100	2040
15 ₃ /4X10 ₂ /3X14 ₁ /8	400X270X360	SM/TR	2540	2270	2250	2010	1745
16X5X10 ₁ /2	406X127X267	SM/TR	1400	1245	1240	1125	1075
16X6X10 ₁ /2	406X153X267	SM/TR	1775	1580	1570	1430	1365
16X7X10 ₁ /2	406X178X267	SM/TR	2155	1915	1905	1730	1655
16X8X10 ₁ /2	406X203X267	SM/TR	2550	2340	2255	2060	2050
16X9X10 ₁ /2	406X229X267	SM/TR	2885	2640	2670	2355	2260
16X3 ₁ /2X12 ₁ /8	406X89X308	TR	870	775	770	700	670
16X4 ₁ /2X10 ₁ /2	406X114X267	SM/TR	1345	1200	1185	1060	925
16X4 ₁ /2X12	406X114X305	SM/TR	1205	1070	1065	965	925
16X3X12 ₁ /8	406X76X308	TR	705	630	625	570	545
16X4X12 ₁ /8	406X102X308	TR	1035	920	915	830	795
16X5X10 ₁ /2	406X127X267	SM/TR	1400	1245	1240	1125	1075
16X5X10 ₁ /2	408X125X275	SL5	1400	1245	1240	1125	1075
16X5X12	406X127X305	SM	1735	1545	1535	1395	1335
16X5X12 ₁ /8	406X127X308	TR	1365	1215	1205	1095	1050
16X6X10 ₁ /2	406X152X267	SM/TR	1775	1580	1570	1430	1365
16X7X10 ₁ /2	406X178X267	SM/TR	2155	1915	1905	1730	1655
16 ₁ /4X4X11 ₁ /4	413X101X286	SM/TR	685	605	795	690	635
16 ₁ /4X5X11 ₁ /4	413X127X286	SM/TR	1415	1260	1250	1135	1090
16 ₁ /4X6X11 ₁ /4	413X153X286	SM/TR	1780	1585	1575	1430	1370
16 ₁ /4X7X11 ₁ /4	413X178X286	SM/TR	2150	1915	1900	1730	1655
16 ₁ /4X8X11 ₁ /4	413X203X286	SM/TR	2515	2235	2225	2020	1935
16 ₁ /4X9X11 ₁ /4	413X229X286	SM/TR	2885	2605	2595	2390	2405
16 ₁ /2X11X13 ₃ /4	420X280X350	SM/TR	2740	2445	2425	2165	1880
16 ₃ /4X6X12	425X152X305	SM	1840	1635	1625	1475	1415
16 ₃ /4X9 ₁ /2X15 ₁ /5	426X240X386	SM/TR	2350	2100	2080	1860	1615
17X5X12 ₁ /8	432X127X308	SM/TR	1460	1300	1295	1175	1125
17X6X12 ₁ /8	432X152X308	SM/TR	1840	1635	1625	1475	1415
17 ₁ /3X3 ₁ /2X14	440X90X360	SM/TR	810	725	720	645	560
17 ₃ /4X8X13	450X203X330	SM	2460	2185	2170	2050	1985

规 格(英制) Tire Size (Inch)	规 格(公制) Metric Size (mm)	花纹 Pattern	最大负荷 Maximum Load (KG)				
			平衡重式叉车 Counterbalanced Forklift				其他工业车辆 Other Industrial Vehicles @16km/h
			@10km/h		@16km/h		
			驱动轮 Driving	转向轮 Steering	驱动轮 Driving	转向轮 Steering	
18X4X14	457X102X356	SM/TR	1135	1010	1000	910	870
18X5X14	457X127X356	SM/TR	1490	1330	1320	1220	1185
18X8X14	457X203X356	SM/TR	2575	2295	2280	2150	2095
18X9X14	457X229X356	SM/TR	2935	2615	2595	2485	2420
18x10x14	480x250x350	SM	3600	3200	3190	2895	2780
18X4 ₁ /2X12 ₁ /8	457X114X308	SM	1425	1255	1250	1125	1075
18X5X12 ₁ /8	457X127X308	SM/TR	1525	1355	1350	1225	1175
18X6X12 ₁ /8	457X152X308	SM/TR	1945	1735	1720	1565	1500
18X7X12 ₁ /8	457X178X308	SM/TR	2370	2110	2095	1905	1820
18X8X12 ₁ /8	457X203X308	SM/TR	2790	2485	2470	2245	2145
18X9X12 ₁ /8	457X229X308	SM/TR	3215	2860	2840	2580	2470
18X10X12 ₁ /8	457X254X308	SM/TR	3455	3050	3085	2855	2810
20X8X15	508X203X381	TR	2940	2615	2600	2365	2260
20X9X15	508X229X381	TR	3370	3000	2980	2710	2590
20X5X16	508X127X406	SM/TR	1620	1440	1430	1300	1245
20X6X16	508X153X406	SM/TR	2010	1790	1775	1650	1595
20X7X16	508X178X406	SM/TR	2405	2150	2120	2010	1955
20X8X16	508X203X406	SM/TR	2795	2490	2475	2250	2150
20X9X16	508X229X406	SM/TR	3190	2840	2820	2565	2455
20X10X16	500X250X398	SM	3190	2840	2820	2565	2455
20X10X16	508X254X406	SM/TR	3330	3115	3155	2815	2800
20X11X16	508X280X406	SM/TR	3555	3230	3215	2970	2840
20 ₁ /2X7X17 ₃ /4	521X178X451	SM	2605	2350	2320	2110	2055
21X5X15	533X127X381	TR	1710	1520	1510	1375	1315
21X6X15	533X148X380	SM	2185	1945	1935	1760	1680
21X6X15	533X152X381	TR	2185	1945	1935	1760	1680
21X7X15	533X178X381	SM/TR	2665	2370	2355	2140	2050
21X8X15	533X203X381	SM/TR	3140	2795	2780	2525	2415
21X9X15	533X229X381	SM/TR	3620	3220	3200	2910	2785
21X10X15	533X254X381	SM/TR	4075	3660	3655	3380	3225
21X11X15	533X280X381	SM/TR	4480	4055	4020	3800	3720
21X12X15	533X305X381	SM/TR	4795	4480	4455	4280	4165
21 ₁ /4X11 ₄ /5X18 ₁ /2	540X300X470	SM/TR	3950	3475	3430	3050	2715
22X5X16	559X127X406	TR	1765	1615	1605	1550	1495
22X6X16	559X152X406	SM/TR	2265	2015	2005	1820	1740
22X7X16	559X178X406	SM/TR	2760	2455	2440	2220	2120
22X8X16	559X203X406	SM/TR	3255	2595	2880	2615	2500
22X9X16	559X229X406	SM/TR	3745	3335	3315	3010	2880
22X10X16	559X254X406	SM/TR	4240	3775	3750	3410	3265
22X10X16	560X254X398	SM	4230	3760	3740	3410	3250
22X12X16	559X305X406	SM/TR	5230	4655	4625	4205	4025
22X12X16	560X305X398	SM	5230	4655	4625	4205	4025
22X14X16	559X356X406	SM/TR	6220	5535	5500	5000	4785
22X14X16	560X356X398	SM/TR	6220	5535	5500	5000	4785
22X16X16	559X406X406	SM/TR	7205	6415	6375	5795	5545
22X5X17 ₃ /4	559X127X450	SM	1715	1565	1555	1500	1445
22X6X17 ₃ /4	559X152X450	SM/TR	2185	1945	1935	1755	1680
22X8X17 ₃ /4	559X203X450	SM/TR	3050	2715	2700	2450	2345
22X12X17 ₃ /4	559X305X450	SM	4765	4195	4220	3860	3670
22 ₄ /5X2 ₃ /4X20 ₁ /2	580X70X520	SM/TR	740	660	655	585	510
22 ₄ /5X4 ₃ /4X20 ₁ /2	580X121X520	SM/TR	1400	1250	1245	1110	970


规格(英制) Tire Size (Inch)	规格(公制) Metric Size (mm)	花纹 Pattern	最大负荷 Maximum Load (KG)				其他工业车辆 Other Industrial Vehicles @16km/h
			平衡重式叉车 Counterbalanced Forklift				
			@10km/h		@16km/h		
			驱动轮 Driving	转向轮 Steering	驱动轮 Driving	转向轮 Steering	
23 ² / ₃ X6 ¹ / ₂ X16 ² / ₃	600X165X424	SM/TR	2050	1810	1780	1605	1400
24X6X16	610X152X406	SM/TR	2370	2110	2100	1905	1825
24X9X18	610X229X455	SM	3900	3470	3445	3265	3110
24X9X18	620X230X455	SM	3900	3470	3445	3265	3110
24X10X18	610X254X455	SM	4240	3775	3755	3620	3485
24X10X18	620X255X455	SM	4610	4130	4075	3710	3540
24X9X19	610X229X475	SM	3740	3330	3310	3160	3005
24X10X19	610X254X475	SM	4050	3615	3595	3405	3245
24X10X19	620X255X475	SM	4490	4020	3970	3570	3460
24X10X19	620X275X480	SM	4850	4320	4290	3950	3730
24 ⁴ / ₅ X10 ¹ / ₄ X22 ⁴ / ₅	630X260X580	SM/TR	3430	3065	3035	2710	2360
24 ⁴ / ₅ X10 ² / ₃ X22 ⁴ / ₅	630X270X580	SM/TR	3570	3190	3160	2820	2450
25 ¹ / ₂ X10X16 ¹ / ₈	645X250X410	SM	4650	4215	4195	4010	3845
26X9X16	660X229X406	SM/TR	3760	3350	3330	3180	3025
26X9X18 ¹ / ₂	660X229X470	SM/TR	3815	3400	3380	3120	2990
26X10X19	660X254X480	SM/TR	4450	3965	3940	3640	3485
26X11X19	660X275X480	SM	5360	4780	4740	4320	4120
26X6X20	660X152X508	SM/TR	2565	2285	2270	2065	1975
26X7X20	660X178X508	SM/TR	3125	2785	2765	2515	2405
26X8X20	660X203X508	SM/TR	3685	3280	3260	2965	2835
26X10X20	660X254X508	SM/TR	4240	3775	3755	3465	3320
26X11X20	660X279X508	SM/TR	4790	4265	4245	3955	3720
26X12X20	660X305X508	SM/TR	5565	5275	5245	5035	4820
26 ³ / ₄ X2 ³ / ₄ X24 ² / ₅	680X70X620	SM/TR	835	745	740	660	570
26 ³ / ₄ X4 ³ / ₄ X24 ² / ₅	680X121X620	SM/TR	1585	1415	1400	1250	1090
26 ³ / ₄ X8 ² / ₃ X25 ¹ / ₅	680X220X640	SM/TR	4035	3595	3700	3390	3105
26 ³ / ₄ X10 ² / ₃ X25 ¹ / ₅	680X270X640	SM/TR	3785	3380	3350	2990	2600
28X10X20	720X254X508	SM	5210	4650	4610	4150	4010
28X10X21	720X254X532	SM	5135	4590	4540	4150	3950
28X7X22	711X178X559	SM/TR	3305	2940	2925	2655	2545
28X8X22	711X203X559	SM/TR	3810	3445	3475	3155	3200
28X9X22	711X229X559	SM/TR	4405	4040	4025	3705	3730
28X10X22	711X254X559	SM/TR	5080	4525	4495	4085	3910
28X10X22	720X254X560	SM	5080	4525	4495	4085	3910
28X11X22	711X279X559	SM/TR	5690	5135	5105	4685	4630
28X11X22	720X275X560	SM	5560	4960	4920	4480	4280
28X12X22	711X305X559	SM/TR	6265	5575	5545	5035	4820
28X14X22	711X356X559	SM/TR	7450	6630	6590	5990	5730
28X16X22	711X406X559	SM/TR	8635	7685	7640	6940	6645
31 ¹ / ₂ X8 ² / ₃ X30	800X220X760	SM/TR	3445	3075	3045	2720	2365
31 ¹ / ₂ X10 ² / ₃ X30	800X270X760	SM/TR	4280	3820	3785	3380	2940
33X13 ³ / ₄ X22	840X350X559	SM	7400	6590	6540	5940	5680
33X15 ³ / ₄ X22	840X400X559	SM	8600	7650	7600	6900	6600
36X8X30	915X203X762	SM/TR	4705	4190	4165	3785	3620
36X9X30	915X229X762	SM/TR	5420	4825	4795	4360	4170
36X10X30	915X254X762	SM/TR	6135	5460	5430	4935	4720
36X12X30	915X305X762	SM/TR	7818	6960	6919	9285	6022
36X14X30	915X356X762	SM/TR	9122	8120	8072	7333	7026
36X16X30	915X406X762	SM/TR	10425	9280	9225	8380	8020
36X22X30	915X559X762	SM/TR	14595	12990	12915	11730	8020
37 ⁴ / ₅ X9X35 ² / ₅	960X226X900	SM/TR	4060	3625	3585	3200	2790
37 ⁴ / ₅ X12 ² / ₃ X35 ² / ₅	960X321X900	SM/TR	5875	5245	5195	4640	4035

规 格 (英制) Tire Size (Inch)	规 格 (公制) Metric Size (mm)	花 纹 Pattern	最大负荷 Maximum Load (KG)				
			平衡重式叉车 Counterbalanced Forklift				其他工业车辆 Other Industrial Vehicles @16km/h
			@10km/h		@16km/h		
			驱动轮 Driving	转向轮 Steering	驱动轮 Driving	转向轮 Steering	
37 ⁴ / ₅ X31 ² / ₂ X36 ¹ / ₅	960X90X920	SM/TR	1455	1300	1290	1150	1005
40X10X30	1016X254X762	SM/TR	7200	6300	6250	11230	5320
40X12X30	1016X305X762	SM/TR	8865	7865	7805	7115	6820
40X14X30	1016X356X762	SM/TR	10750	9535	9475	8625	8270
40X16X30	1016X406X762	SM/TR	12595	11210	11140	10125	9690
40X18X30	1016X457X762	SM/TR	14300	11270	12500	11440	11010
40X20X30	1016X508X762	SM/TR	16100	14300	14100	12880	12400
42X18X36	1066X457X914	SM/TR	17620	15650	15550	13850	12220
63X6X61 ² / ₅	1600X150X1560	SM/TR	3825	3415	3380	3020	2630
63X8 ² / ₃ X61 ² / ₅	1600X220X1560	SM/TR	5790	5170	5120	4570	3975



规 格 (英制) Tire Size (Inch)	规 格 (公制) Metric Size (mm)	花 纹 Pattern	花纹深度 Pattern Depth (mm)	外直径 Outer Diameter (mm)	断面宽 Section Width (mm)	最大负荷 Maximum Load (KG)	满载速度 Full Load Speed (km/h)
56X22	1422x558.5	GN016S	75	1423	550	28000	15
56x26	1422x660	GN016S	75	1423	660	33000	15
56x28	1422x711	GN016S	75	1423	711	35500	15
56x33	1422x838	GN016S	75	1423	838	42000	15
54x25	1356x635	GN016S	50	1375	635	32000	10
54x26	1356x660	GN016S	50	1375	660	33300	15
54x28	1356x711	GN016S	50	1375	711	35000	3
60x14	1510x355	GN016S	50	1510	355	18800	15
60x20	1510x470	GN016S	50	1510	470	25000	15
60x25	1510x635	GN016S	50	1510	635	33500	15
69x18	1750x160x455	GN002S	75	1750	450	37000	15
69x18	1750x220x455	GN002S	75	1750	450	37000	15
69x21	1750x220x530	GN002S	75	1750	530	39000	15
69x22	1750x220x559	GN002S	75	1750	559	40000	15
69x24	1750x220x600	GN002S	75	1750	600	42000	15

SPECIAL COMPOUNDS AVAILABLE






聚氨酯填充轮胎 Polyurethane Foam-Filled Tyre



规格 Tire Size	层级 PR	花纹 Pattern	轮辋 Rim Size	断面宽 S.W.	外直径 O.D.	最大负荷 Load Capacity/ Kg @10km/h
9-14.5	14	RIB	7x14.5	241	720	1580
9-14.5	12	MIX	7x14.5	241	705	2790
10-16.5	10	R4	8.25x16.5	262	763	2130
12-16.5	12	R4	9.75x16.5	305	812	2863
12-21.5 (305-546)	10	R4	9.75x21.5	280	805	2860
12-22.5 (305-546)	10	R4	9.75x22.5	280	805	2945
14-17.5	14	R4	10.5x17.5	348	930	3870
15-19.5 (385/65D19.5)	16	R4	11.75x19.5	395	1010	4930
18-19.5 (445/65D19.5)	16	R4	13x19.5	450	1030	6005
23x8.50-12	8	R4	7JAx12	213	570	820
23x10.50-360	6	R1	8x14	248	580	2540
26x12-15 (26x12D380)	8	R1/R4	10x15	300	665	1558
26x12-16.5 (300/40-16.5)	8	R4	9.75x16.5	305	660	1250
26x12-16.5 (300/40-16.5)	10/12	R1	9.75x16.5	300	665	1605/2060
27x10.5-15	12	R4	8LBx15	245	695	3150
33x12D610 (33x12-24) (33x12D24)	12	R4	10x24	295	835	1805
33x15.5-16.5	14	R4	12x16.5	394	838	3980
36x14D22.5	18	R4	11.75x22.5	360	910	4850
36x14D610 (36x14-24) (36x14D24)	14	R4	13x24	350	910	4850
39x15-22.5	16	R4	13x22.5	375	970	6525
39x15-22.5	16	R4	11.75x22.5	360	940	6400
240/55D17.5	12	R4	6.75x17.5	220	715	2000
265/50D20	10	---	W9x20	266	816	5650
315/55D20	12	R4	11x20	318	840	2875
355/55D625 (14-24.5) (355/55D24.5)	14	R4	11.75x24.5	350	940	3455
370/75-28	14	---	11x28	364	1273	5450
385/45-28	16	R4	13x28	380	1070	6005
385/50D625 (15-625) (385/50D24.5) (15-24.5)	16	R4	13x24.5	386	960	5610
385/65D19.5 (15-19.5)	16	R4	11.75x19.5	395	1010	4930
385/65D22.5 (15-22.5) (385/65-22.5)	16/18	R4	11.75x22.5	387	1069	5598/6005
400/75-28	16	---	12x28	392	1305	6500
445/45D625 (18-625) (445/45D24.5) (18-24.5)	16	R4	15x24.5	425	1010	6905
445/50D710 (18-710) (445/50D28)	18	R4	15x28	445	1180	7320
445/50D710 (18-710)	18	R4	13x22.5	445	1180	7245
445/55D19.5	16	R4	13x19.5	425	1016	7245
445/55D22.5 (445/55-22.5)	18	R4	22.5x13	412/438	1170	7245
445/55-25	18	R4	13/2.0x28	450	1210	12000
445/65D22.5 (18-22.5)	18	R4	13x22.5	445	1152	7323
10.5/80-18	10	---	9x18	273	900	1935
12.5/80-18	12	---	11x18	308	980	2625
1300-24	16	G2/L2	10x24	335	1285	6500
1400-24	16	G2/L2	10x24	355	1345	7300
840x15.5-510	14	R4	14x20	392	860	6560
1350x380	14	---	640x280	375	1330	8900



For the OTR tyres, according to the classification of different tread depth, there are 3 series that can be chosen by their use of conditions.

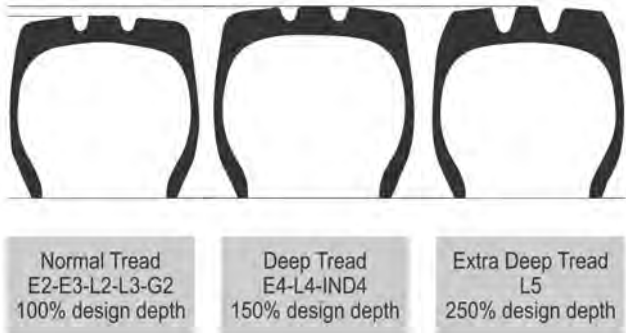

Different Types Of Machinery	
CODE	APPLICATION
C	Compactor
E	Transport
L	Loader and Bulldozer
G	Grader
IND	Industrial Vehicle

Tread Pattern	
INDEX	PATTERN
1	RIBBED
2	TRACTION
3	ROCK
4	ROCK(deep tread)
5	ROCK(very-deep tread)
7	FLOTATION
5	SMOOTH

GN601

E-3/L-3



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
15.5-25 NHS	16	TTF/TL	E-3/L-3	12.00/1.3	1275	395	525	6750
17.5-25 NHS	16	TTF/TL	E-3/L-3	14.00/1.5	1350	445	475	7300
17.5-25 NHS	20	TTF/TL	E-3/L-3	14.00/1.5	1350	445	575	8250
17.5-25 NHS	24	TTF/TL	E-3/L-3	14.00/1.5	1350	445	675	9000
20.5-25 NHS	16	TTF/TL	E-3/L-3	17.00/2.0	1490	520	350	8250
20.5-25 NHS	20	TTF/TL	E-3/L-3	17.00/2.0	1490	520	450	9500
20.5-25 NHS	24	TTF/TL	E-3/L-3	17.00/2.0	1490	520	525	10300

23.5-25 NHS	20	TTF/TL	E-3/L-3	19.50/2.5	1615	595	375	10900
23.5-25 NHS	24	TTF/TL	E-3/L-3	19.50/2.5	1615	595	475	12500
23.5-25 NHS	28	TTF/TL	E-3/L-3	19.50/2.5	1615	595	550	13600
26.5-25 NHS	24	TTF/TL	E-3/L-3	22.00/3.0	1750	675	400	14000
26.5-25 NHS	28	TTF/TL	E-3/L-3	22.00/3.0	1750	675	475	15500
26.5-25 NHS	32	TTF/TL	E-3/L-3	22.00/3.0	1750	675	550	17000
26.5-25 NHS	36	TL(54mm)	E-4/L-4	22.00/3.0	1800	675	625	18000
26.5-25 NHS	44	TL(54mm)	E-4/L-4	22.00/3.0	1800	675	750	22000
29.5-25 NHS	28	TTF/TL	E-3/L-3	25.00/3.5	1875	750	425	17500
29.5-25 NHS	32	TTF/TL	E-3/L-3	25.00/3.5	1875	750	475	18800
29.5-25 NHS	34	TL(64mm)	E-4/L-4	25.00/3.5	1920	750	525	19800
29.5-29 NHS	34	TTF/TL	E-3/L-3	25.00/3.5	1975	750	525	21200
29.5-29 NHS	40	TTF/TL	E-3/L-3	25.00/3.5	1975	750	625	23600
29.5-29 NHS	46	TL(45mm)	E-4/L-4	25.00/3.5	1975	750	1000	25750
33.25-35 NHS	32	TL	E-3/L-3	27.00/3.5	2240	845	450	25750
33.25-35 NHS	38	TL	E-3/L-3	27.00/3.5	2240	845	550	28000
33.25-35 NHS	44	TL	E-3/L-3	27.00/3.5	2240	845	650	30300
37.25-35 NHS	30	TL	E-3/L-3	31.00/4.0	2390	945	375	28000
37.25-35 NHS	36	TL	E-3/L-3	31.00/4.0	2390	945	450	30750
37.25-35 NHS	42	TL	E-3/L-3	31.00/4.0	2390	945	525	33500
13.00-24 NHS	20	TTF/TL	E-3/L-3	10.00	1300	350	750	7500
13.00-25 NHS	20	TTF/TL	E-3/L-3	10.00/1.5	1300	350	750	7500
13.00-25 NHS	22	TTF/TL	E-3/L-3	10.00/1.5	1300	350	825	8000
14.00-20 NHS	24	TTF/TL	E-3/L-3	10.00	1265	375	850	8500
14.00-24 NHS	20	TTF/TL	E-3/L-3	10.00/2.0	1370	375	700	8500
14.00-24 NHS	24	TTF/TL	E-3/L-3	10.00/2.0	1370	375	850	9500
14.00-24 NHS	28	TTF/TL	E-3/L-3	10.00/2.0	1370	375	925	10000
14.00-25 NHS	24	TTF/TL	E-3/L-3	10.00/2.0	1370	375	850	9500
14.00-25 NHS	28	TTF/TL	E-3/L-3	10.00/2.0	1370	375	925	10000
16.00-24 NHS	20	TTF/TL	E-3/L-3	11.25/2.0	1495	430	550	9750
16.00-24 NHS	24	TTF/TL	E-3/L-3	11.25/2.0	1495	430	650	10600
16.00-24 NHS	28	TTF/TL	E-3/L-3	11.25/2.0	1495	430	750	11500
16.00-24 NHS	32	TTF/TL	E-3/L-3	11.25/2.0	1495	430	875	12500
16.00-25 NHS	28	TTF/TL	E-3/L-3	11.25/2.0	1495	430	750	11500
16.00-25 NHS	32	TTF/TL	E-3/L-3	11.25/2.0	1495	430	875	12500
16.00-25 NHS	36	TTF/TL	E-3/L-3	11.25/2.0	1495	430	975	13600
18.00-25 NHS	28	TTF/TL	E-3/L-3	13.00/2.5	1615	500	650	13600
18.00-25 NHS	32	TTF/TL	E-3/L-3	13.00/2.5	1615	500	750	15000
18.00-25 NHS	36	TTF/TL	E-3/L-3	13.00/2.5	1615	500	850	16000
18.00-25 NHS	40	TTF/TL	E-3/L-3	13.00/2.5	1615	500	950	17000
7.50-16 NHS	8	TTF	E-3/L-3	6.00G	810	215	500	1900
8.25-16 NHS	10	TTF	E-3/L-3	6.50H	885	235	550	1800
9.00-16 NHS	12	TTF	E-3/L-3	6.50H	890	255	630	1950
10.00-16 NHS	12	TTF	E-3/L-3	W8L	910	275	310	1090
11.00-16 NHS	12	TTF	E-3/L-3	W10L	884	244	320	1100
12.00-16 NHS	14	TTF	E-3/L-3	8.5	884	244	680	1705
14/90-16 NHS	14	TTF	E-3/L-3	7.0N / 8.5H	896	215	290	1245
16/70-16 NHS	14	TTF	E-3/L-3	8.5H / 10.00G	870	260	390	1055
16/90-16 NHS	14	TTF	E-3/L-3	8.5H	870	260	390	1055
18/90-16 NHS	16	TTF	E-3/L-3	8.5H	870	260	350	1600
16/70-20 NHS	16	TTF/TL	E-3/L-3	13	1075	410	450	5150
16/70-24 NHS	16	TTF/TL	E-3/L-3	13	1175	410	450	5600
16/70-24 NHS	24	TTF	E-3/L-3	13	1175	410	900	8000
20.5/70-16 NHS	14	TTF	E-3/L-3	8.5H / 10.00G	1075	410	350	2850
23.5/70-16 NHS	14	TTF	E-3/L-3	8.5H	1075	410	350	2850

GN603
E-3/L-3



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
23.5-25 NHS	20	TTF/TL	E-3/L-3	35	19.50/2.5	1615	595	375	10900
23.5-25 NHS	24	TTF/TL	E-3/L-3	35	19.50/2.5	1615	595	475	12500
23.5-25 NHS	28	TTF/TL	E-3/L-3	35	19.50/2.5	1615	595	550	13600
13.00-25 NHS	28	TTF/TL	E-3/L-3	24.5	10.00/1.5	1300	350	1050	9250
13.00-25 NHS	32	TTF/TL	E-3/L-3	26	10.00/1.5	1300	350	1200	10000
14.00-24 NHS	28	TTF/TL	E-3/L-3	25.5	10.00/2.0	1370	375	925	10000
14.00-24 NHS	32	TTF/TL	E-3/L-3	28	10.00/2.0	1370	375	1050	10900
14.00-25 NHS	28	TTF/TL	E-3/L-3	28	10.00/2.0	1370	375	925	10000
14.00-25 NHS	32	TTF/TL	E-3/L-3	28	10.00/2.0	1370	375	1050	10900
14.00-25 NHS	36	TTF/TL	E-3/L-3	28	10.00/2.0	1370	375	1200	11500
16.00-25 NHS	36	TTF/TL	E-3/L-3	28 / 36	11.25/2.0	1495	430	975	13600
16.00-25 NHS	40	TTF/TL	E-3/L-3	32	11.25/2.0	1495	430	1075	14500

GN604
E-3/L-3



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
15.5-25 NHS	16	TTF/TL	E-3/L-3	12.00/1.3	1275	395	525	6750
17.5-25 NHS	16	TTF/TL	E-3/L-3	14.00/1.5	1350	445	475	7300
17.5-25 NHS	20	TTF/TL	E-3/L-3	14.00/1.5	1350	445	575	8250
17.5-25 NHS	24	TTF/TL	E-3/L-3	14.00/1.5	1350	445	675	9000
20.5-25 NHS	16	TTF/TL	E-3/L-3	17.00/2.0	1490	520	350	8250
20.5-25 NHS	20	TTF/TL	E-3/L-3	17.00/2.0	1490	520	450	9500
20.5-25 NHS	24	TTF/TL	E-3/L-3	17.00/2.0	1490	520	525	10300
23.5-25 NHS	20	TTF/TL	E-3/L-3	19.50/2.5	1615	595	375	10900
23.5-25 NHS	24	TTF/TL	E-3/L-3	19.50/2.5	1615	595	475	12500
23.5-25 NHS	28	TTF/TL	E-3/L-3	19.50/2.5	1615	595	550	13600
26.5-25 NHS	24	TTF/TL	E-3/L-3	22.00/3.0	1750	675	400	14000
26.5-25 NHS	28	TTF/TL	E-3/L-3	22.00/3.0	1750	675	475	15500
26.5-25 NHS	32	TTF/TL	E-3/L-3	22.00/3.0	1750	675	550	17000
29.5-25 NHS	28	TTF/TL	E-3/L-3	25.00/3.5	1875	750	425	17500
29.5-25 NHS	32	TTF/TL	E-3/L-3	25.00/3.5	1875	750	475	18800
16.00-25 NHS	28	TTF/TL	E-3/L-3	11.25/2.0	1495	430	750	11500
16.00-25 NHS	32	TTF/TL	E-3/L-3	11.25/2.0	1495	430	875	12500
16.00-25 NHS	36	TTF/TL	E-3/L-3	11.25/2.0	1495	430	975	13600
18.00-25 NHS	28	TTF/TL	E-3/L-3	13.00/2.5	1615	500	650	13600
18.00-25 NHS	32	TTF/TL	E-3/L-3	13.00/2.5	1615	500	750	15000
18.00-25 NHS	36	TTF/TL	E-3/L-3	13.00/2.5	1615	500	850	16000
18.00-25 NHS	40	TTF/TL	E-3/L-3	13.00/2.5	1615	500	950	17000

9.00-16 NHS	12	TTF	E-3/L-3	6.50H	890	255	630	1950
10.00-16 NHS	12	TTF	E-3/L-3	6.50H	910	275	310	1090
12.00-16 NHS	14	TTF	E-3/L-3	8.5	884	244	680	1705
14/90-16 NHS	14	TTF	E-3/L-3	8.5H	896	215	290	1245
16/70-16 NHS	14	TTF	E-3/L-3	10.00G	870	260	320	1425
18/90-16 NHS	16	TTF	E-3/L-3	10.00G	870	260	350	1600
16/70-20 NHS	16	TTF/TL	E-3/L-3	13	1075	410	450	5150
16/70-24 NHS	16	TTF/TL	E-3/L-3	13	1175	410	450	5600
16/70-24 NHS	24	TTF	E-3/L-3	13	1175	410	900	8000
20.5/70-16 NHS	14	TTF	E-3/L-3	8.5H / 10.00G	1075	410	350	2850
23.5/70-16 NHS	14	TTF	E-3/L-3	8.5H	1075	410	350	2850

GN605
E-3/L-3



GN601+
E-3/L-3



规 格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern		标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
17.5-25 NHS	16	TTF/TL	GN601+	E-3/L-3	14.00/1.5	1350	445	475	7300
17.5-25 NHS	20	TTF/TL	GN601+	E-3/L-3	14.00/1.5	1350	445	575	8250
17.5-25 NHS	24	TTF/TL	GN601+	E-3/L-3	14.00/1.5	1350	445	675	9000
23.5-25 NHS	20	TTF/TL	GN605,GN601+	E-3/L-3	19.50/2.5	1615	595	375	10900
23.5-25 NHS	24	TTF/TL	GN605,GN601+	E-3/L-3	19.50/2.5	1615	595	475	12500
23.5-25 NHS	28	TTF/TL	GN605,GN601+	E-3/L-3	19.50/2.5	1615	595	550	13600

GN606
L-4



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
17.5-25 NHS	16	TTF/TL	L-4	14.00/1.5	1350	445	475	7300
17.5-25 NHS	20	TTF/TL	L-4	14.00/1.5	1350	445	575	8250
17.5-25 NHS	24	TTF/TL	L-4	14.00/1.5	1350	445	675	9000
23.5-25 NHS	20	TTF/TL	L-4	19.50/2.5	1615	595	375	10900
23.5-25 NHS	24	TTF/TL	L-4	19.50/2.5	1615	595	475	12500
23.5-25 NHS	28	TTF/TL	L-4	19.50/2.5	1615	595	550	13600

GN608

L-5/L-4



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
17.5-25 NHS	16	TTF/TL	L-5		14.00/1.5	1350	445	475	7300
17.5-25 NHS	20	TTF/TL	L-5		14.00/1.5	1350	445	575	8250
17.5-25 NHS	24	TTF/TL	L-5		14.00/1.5	1350	445	675	9000
20.5-25 NHS	16	TTF/TL	L-5		17.00/2.0	1490	520	350	8250
20.5-25 NHS	20	TTF/TL	L-5		17.00/2.0	1490	520	450	9500
20.5-25 NHS	24	TTF/TL	L-5		17.00/2.0	1490	520	525	10300
23.5-25 NHS	20	TTF/TL	L-5		19.50/2.5	1615	595	375	10900
23.5-25 NHS	24	TTF/TL	L-5		19.50/2.5	1615	595	475	12500
23.5-25 NHS	28	TTF/TL	L-5		19.50/2.5	1615	595	550	13600
26.5-25 NHS	24	TTF/TL	L-5		22.00/3.0	1750	675	400	14000
26.5-25 NHS	28	TTF/TL	L-5		22.00/3.0	1750	675	475	15500
26.5-25 NHS	32	TTF/TL	L-5		22.00/3.0	1750	675	550	17000
29.5-25 NHS	28	TTF/TL	L-5		25.00/3.5	1875	750	425	17500
29.5-25 NHS	32	TTF/TL	L-5		25.00/3.5	1875	750	475	18800
29.5-29 NHS	34	TTF/TL	L-5		25.00/3.5	1975	750	525	21200
29.5-29 NHS	40	TTF/TL	L-5		25.00/3.5	1975	750	625	23600
35/65-33 NHS	24	TL	L-5	97	28.00/3.5	2075	890	350	19000
35/65-33 NHS	30	TL	L-5	97	28.00/3.5	2075	890	425	21200
35/65-33 NHS	36	TL	L-5	97	28.00/3.5	2075	890	525	23600
35/65-33 NHS	42	TL	L-5	97	28.00/3.5	2075	890	625	26500
45/65-45 NHS	38	TL	L-5	123.5	36.00/4.5	2735	1140	425	38750
45/65-45 NHS	46	TL	L-5	123.5	36.00/4.5	2735	1140	525	43750
45/65-45 NHS	50	TL	L-5	123.5	36.00/4.5	2735	1140	575	46250
45/65-45 NHS	58	TL	L-5	123.5	36.00/4.5	2735	1140	675	50000
50/65-51 NHS	46	TL	L-5	126	40.00/4.5	3060	1270	475	53000
50/65-51 NHS	54	TL	L-5	126	40.00/4.5	3060	1270	575	58000
16/70-16 NHS	16	TTF	L-5	45	10.00G	910	335	325	2700
16/70-20 NHS	16	TTF/TL	L-5	40	13.0	1075	410	350	2925
16/70-20 NHS	18	TTF/TL	L-5	40	13.0(SDC)	1075	410	550	5800
20.5/70-16 NHS	14	TTF/TL	L-5	40	10.00G	955	356	390	1800
20.5/70-16 NHS	16	TTF/TL	L-5	45	10.00G	910	335	325	2700
20.5/70-17 NHS	18	TTF/TL	L-5	40	8.5(SDC)	895	320	420 @50km/h	2460 @50km/h
10-16.5 NHS	28	TTF	L-4	53	19.50/2.5	1635	595	550	13600
45/65-45 NHS	38	TL	L-4	69.5	36.00/4.5	2735	1140	425	38750
45/65-45 NHS	46	TL	L-4	69.5	36.00/4.5	2735	1140	525	43750
45/65-45 NHS	50	TL	L-4	69.5	36.00/4.5	2735	1140	575	46250
45/65-45 NHS	58	TL	L-4	69.5	36.00/4.5	2735	1140	675	50000

GN610

L-5S/L-4S



GN611

C-1



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
17.5-25 NHS	20	TTF/TL	L-5S	45 / 50 / 58 / 63	14.00/1.5	1400	445	575	8250
17.5-25 NHS	24	TTF/TL	L-5S	50 / 58 / 63 / 82	14.00/1.5	1400	445	700	9250
26.5-25 NHS	28	TL	L-5S	87.5	22.00/3.0	1800	675	475	15500
26.5-25 NHS	32	TL	L-5S	87.5	22.00/3.0	1800	675	550	17000
26.5-25 NHS	36	TL	L-5S	80 / 87.5 / 100	22.00/3.0	1800	675	625	18300
29.5-25 NHS	28	TL	L-5S	95	25.00/3.5	1920	750	425	17500
29.5-25 NHS	32	TL	L-5S	95	25.00/3.5	1920	750	475	18800
29.5-25 NHS	34	TL	L-5S	95 / 110	25.00/3.5	1920	750	525	19800
29.5-29 NHS	34	TL	L-5S	97.5	25.00/3.5	2025	750	525	21200
29.5-29 NHS	40	TL	L-5S	97.5 / 110	25.00/3.5	2025	750	625	23600
35/65-33 NHS	36	TL	L-5S	97	28.00/3.5	2075	890	525	23600
35/65-33 NHS	42	TL	L-5S	97	28.00/3.5	2075	890	625	26500
18.00-25 NHS	24	TL	L-5S	79	13.00/2.5	1675	500	550	12500
18.00-25 NHS	28	TL	L-5S	79	13.00/2.5	1675	500	650	13600
18.00-25 NHS	32	TL	L-5S	79 / 85	13.00/2.5	1675	500	750	15000
14.00-24 NHS	24	TTF	L-5S	63.5	10.0	1420	375	850	9500
14.00-24 NHS	28	TTF	L-5S	63.5	10.0	1420	375	925	10000
14.00-24 NHS	28	TTF	L-5S	77	10.0	1420	386	1000	13500
12.00-24 NHS	24	TTF	L-5S	40 / 55	8.5	1275	315	975	7500
12.00-24 NHS	24	TTF	L-5S	47 / 55 / 70	8.5	1300	333	1000	10250
12.00-20 NHS	20	TTF	L-5S	57	8.5	1145	315	900	6325
12.00-20 NHS	24	TTF	L-5S	45	8.5	1173	315	1000	6900
12.00-20 NHS	28	TTF	L-5S	67	8.5	1173	340	1030	8620
10.00-20 NHS	18	TTF	L-5S	40	7.5	1075	278	750	4600
10.00-20 NHS	18	TTF	L-5S	58	7.5	1097	300	1000	7255
9.00-20 NHS	16	TTF	L-5S	55	7.0	1045	255	825	4750
8.25-15 NHS	24	TTF	L-5S	52	6.5	864	260	1030	4550
7.50-15 NHS	16	TTF	L-4S	25	6.00	820	220	1000	2975
10.00-20 NHS	16	TTF	L-4S	32	7.5	1058	278	790	5080
14.00-24 NHS	24	TTF	L-4S	45.5	10.0	1420	375	850	9500
14.00-24 NHS	28	TTF	L-4S	45.5	10.0	1420	375	925	10000
7.50-15 NHS	6	TTF	C-1	12	6.00	785	215	100	1850
7.50-15 NHS	14	TTF	C-1	12 / 18	6.00	785	215	875	2900
7.50-16 NHS	14	TTF	C-1	18	6.00	810	215	925	3075
9.00-20 NHS	16	TTF	C-1	20	7.0	1015	255	825	4750
11.00-20 NHS	16	TTF/TL	C-1	16 / 22	8.0	1085	293	725	5450
11.00-20 NHS	24	TTF	C-1	22	8.0	1085	293	1025	6700
12.00-20 NHS	16	TTF	C-1	26	8.5	1120	316	650	5800
12.00-20 NHS	24	TTF	C-1	26	8.5	1120	316	1025	7550
10.0/80-12 NHS	12	TL	C-1		9.0	710	264	470	1600
13/80-20 NHS	18	TT	C-1	20	8.5	1060	310	900	6000
14/70-20 NHS	20	TT	C-1	22	11.00TG	952	356	760	5450
23.1-26 NHS	14	TTF/TL	C-1	22	DW20	1500	595	230	5600



GRANDNOVA



GN612

G-2/L-2

规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @40km/h	最大负荷 Max Load (KG) @40km/h
15.5-25 TG	12	TTF/TL	G-2/L-2	24.5	12.00/1.3	1275	395	225	2650
17.5-25 TG	16	TTF/TL	G-2/L-2	26	14.00/1.5	1350	445	275	3350
20.5-25 TG	16	TTF/TL	G-2/L-2	29	17.00/2.0	1490	520	225	4000
23.5-25 TG	24	TTF/TL	G-2/L-2	30	19.50/2.5	1615	595	200	4750
13.00-24 TG	12	TTF/TL	G-2/L-2	24	8.00TG	1280	335	300	2725
13.00-24 NHS	20	TTF	G-2/L-2	23	10.0	1300	350	750	7500
14.00-24 TG	16	TTF/TL	G-2/L-2	25	8.00TG	1350	360	375	3650
14.00-24 NHS	24	TTF	G-2/L-2	26	10.0	1370	375	850	9500
16.00-24 TG	16	TTF/TL	G-2/L-2	28.5	10.00VA	1460	425	325	4500



GNA01

R-1

GN638

E-3/L-3

规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
23.5-25 NHS	20	TTF/TL	GNA01, GN638 R-1, E-3/L-3	19.50/2.5	1615	595	375	10900
23.5-25 NHS	24	TTF/TL	GNA01, GN638 R-1, E-3/L-3	19.50/2.5	1615	595	475	12500
23.5-25 NHS	28	TTF/TL	GNA01, GN638 R-1, E-3/L-3	19.50/2.5	1615	595	550	13600



GN639

L-4

规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
13.00-25 MINING	32	TTF	E-3	30	8.5	1300	350	950	9500
14.00-20 MINING	24	TTF	E-3	29	10.00	1245	375	890	8500
14.00-25 MINING	40	TTF	E-3	33	10.00/2.0	1370	375	1200	11500
17.5-25 NHS	24	TL	L-4	45	14.00/1.5	1400	445	675	9000
17.5-25 NHS Logstacker Service	36	TL	L-4	45	14.00/1.5	1400	445	1200	18500
23.5-25 NHS	20	TTF	L-4	51	19.50/2.5	1615	595	375	10900
23.5-25 NHS	24	TTF/TL	L-4	51	19.50/2.5	1615	595	475	12500
23.5-25 NHS	32	TTF/TL	L-4	51	19.50/2.5	1615	595	550	13600
26.5-25 NHS	36	TL	L-4	54	22.00/3.0	1800	675	625	18000



GN640

L-4

规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
17.5-25 NHS/MINING	20	TTF/TL	L-4	45	14.00/1.5	1400	445	575	8250
17.5-25 NHS/MINING	24	TTF/TL	L-4	45	14.00/1.5	1400	445	650	8950
20.5-25 NHS/MINING	24	TTF/TL	L-4	51	17.00/2.0	1560	520	525	10300
20.5-25 NHS/MINING	28	TTF/TL	L-4	51	17.00/2.0	1560	520	625	11500
23.5-25 NHS/MINING	24	TTF/TL	L-4	55	19.50/2.5	1675	595	475	12500
23.5-25 NHS/MINING	28	TTF/TL	L-4	55	19.50/2.5	1675	595	550	13600
23.5-25 NHS/MINING	32	TTF/TL	L-4	55	19.50/2.5	1675	595	625	14600
26.5-25 NHS/MINING	28	TL	L-4	54	22.00/3.0	1800	675	450	15500
26.5-25 NHS/MINING	32	TL	L-4	54	22.00/3.0	1800	675	525	17000
29.5-25 NHS/MINING	28	TL	L-4	57	25.00/3.5	1920	750	425	17500
29.5-25 NHS/MINING	34	TL	L-4	57	25.00/3.5	1920	750	525	20000



GN801

E-3/L-3

规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
750/65-25 NHS	★★★	TL	E-3/L-3	24.00/3.0	1585	735	475 / 625	15000 / 18500
750/65-25 MINING	★★★	TL	E-3/L-3	24.00/3.0	1585	735	425@40km/h	10000@40km/h



GN627

R-3/C-2/E-7

规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
23.1-26 NHS	12	TTF/TL	R-3/C-2/E-7	16	DW20	1500	595	200	5150
23.1-26 NHS	14	TTF/TL	R-3/C-2/E-7	16	DW20	1500	595	230	5600
23.1-26 NHS	16	TTF/TL	R-3/C-2/E-7	16	DW20	1500	595	260	6150
18.4-26 NHS	12	TTF/TL	R-3/E-7		DW16	1450	464	230	2985



矿山专用轮胎 Super Mining OTR Tire

GN601
Mining E-3



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
13.00-25 MINING	28	TTF/TL	E-3	27	10.00/1.5	1300	350	1050	9250
14.00-20 MINING	24	TTF/TL	E-3		10.00	1245	375	850	8500
14.00-24 MINING	28	TTF/TL	E-3	27	10.00/2.0	1370	375	925	10000
14.00-25 MINING	28	TTF/TL	E-3		10.00/2.0	1370	375	925	10000
16.00-25 MINING	36	TTF/TL	E-3	28 / 36	11.25/2.0	1495	430	975	13600
18.00-25 MINING	32	TTF/TL	E-3	32	13.00/2.5	1615	500	750	15000
18.00-25 MINING	40	TTF/TL	E-3	32	13.00/2.5	1615	500	950	17000
17.5-25 MINING	20	TTF/TL	E-3		14.00/1.5	1350	445	575	8250
20.5-25 MINING	28	TTF/TL	E-3		17.00/2.0	1490	520	625	11500
23.5-25 MINING	28	TTF/TL	E-3		19.50/2.5	1615	595	550	13600
26.5-25 MINING	32	TTF/TL	E-3		22.00/3.0	1750	675	550	17000
29.5-25 MINING	28	TTF/TL	E-3		25.00/3.5	1875	750	425	17500
29.5-29 MINING	40	TTF/TL	E-3		25.00/3.5	1975	750	625	23600

GN603
Mining E-3



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
10.00-20 MINING	18	TTF	E-3	28.5	7.5	1073	278	910	3350
10.00-20 MINING	24	TTF	E-3	28	7.5	1055	378	1000 @20km/h	4800 @20km/h
11.00-20 MINING	18	TTF	E-3	24 / 26.5	8.0	1105	293	910	3650
11.00-20 MINING	20	TTF	E-3	24	8.0	1105	293	1000	3875
12.00-20 MINING	18	TTF	E-3	25	8.5	1145	315	775	5800
12.00-20 MINING	20	TTF	E-3	25	8.5	1145	315	825	6150
13.00-25 MINING	28	TTF/TL	E-3	24.5	10.00/1.5	1300	350	1050	9250
13.00-25 MINING	32	TTF/TL	E-3	26	10.00/1.5	1300	350	1200	10000
14.00-24 MINING	28	TTF/TL	E-3	25	10.00/2.0	1370	375	925	10000
14.00-24 MINING	32	TTF/TL	E-3	28	10.00/2.0	1370	375	1050	10900
14.00-25 MINING	28	TTF/TL	E-3	28	10.00/2.0	1370	375	925	10000
14.00-25 MINING	32	TTF/TL	E-3	28	10.00/2.0	1370	375	1050	10900
14.00-25 MINING	36	TTF/TL	E-3	28	10.00/2.0	1370	375	1200	11500
16.00-25 MINING	36	TTF/TL	E-3	28 / 36	11.25/2.0	1495	430	975	13600
16.00-25 MINING	40	TTF/TL	E-3	32	11.25/2.0	1495	430	1075	14500

GN608
Mining L-5



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
17.5-25 MINING	20	TTF/TL	L-5	63.5	14.00/1.5	1400	445	575	8250
17.5-25 MINING	24	TTF/TL	L-5	63.5	14.00/1.5	1400	445	650	8950
20.5-25 MINING	24	TTF/TL	L-5	71	17.00/2.0	1560	520	525	10300
20.5-25 MINING	28	TTF/TL	L-5	71	17.00/2.0	1560	520	625	11500
23.5-25 MINING	24	TTF/TL	L-5	65 / 78	19.50/2.5	1675	595	475	12500
23.5-25 MINING	28	TTF/TL	L-5	65 / 78	19.50/2.5	1675	595	550	13600
23.5-25 MINING	32	TTF/TL	L-5	65 / 78	19.50/2.5	1675	595	625	14600
26.5-25 MINING	28	TL	L-5	60 / 87	22.00/3.0	1800	675	475	15500
26.5-25 MINING	32	TL	L-5	60 / 87	22.00/3.0	1800	675	550	17000
29.5-25 MINING	28	TL	L-5	95	25.00/3.5	1920	750	425	17500
29.5-25 MINING	34	TL	L-5	95	25.00/3.5	1920	750	525	20000
29.5-29 MINING	34	TL	L-5	97.5	25.00/3.5	1975	750	525	21200
29.5-29 MINING	40	TL	L-5	97.5	25.00/3.5	1975	750	625	23600
35/65-33 MINING	24	TL	L-5	97	28.00/3.5	2075	890	350	19000
35/65-33 MINING	30	TL	L-5	97	28.00/3.5	2075	890	425	21200
35/65-33 MINING	36	TL	L-5	97	28.00/3.5	2075	890	525	23600
35/65-33 MINING	42	TL	L-5	97	28.00/3.5	2075	890	625	26500
45/65-45 MINING	38	TL	L-5	123.5	36.00/4.5	2735	1140	425	38750
45/65-45 MINING	46	TL	L-5	123.5	36.00/4.5	2735	1140	525	43750
45/65-45 MINING	50	TL	L-5	123.5	36.00/4.5	2735	1140	575	46250
45/65-45 MINING	58	TL	L-5	123.5	36.00/4.5	2735	1140	675	50000
50/65-51 MINING	46	TL	L-5	126	40.00/4.5	3060	1270	475	53000
50/65-51 MINING	54	TL	L-5	126	40.00/4.5	3060	1270	575	58000

GN610

Mining L-5S/L-4S



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
17.5-25 MINING	20	TTF/TL	L-5S	45 / 50 / 58 / 63	14.00/1.5	1400	445	575	8250
17.5-25 MINING	24	TTF/TL	L-5S	50 / 58 / 63 / 82	14.00/1.5	1400	445	700	9250
26.5-25 MINING	36	TL	L-5S	80 / 100	22.00/3.0	1800	675	625	18300
29.5-25 MINING	34	TL	L-5S	110	25.00/3.5	1920	750	525	19800
29.5-29 MINING	40	TL	L-5S	110	25.00/3.5	2025	750	625	23600
18.00-25 MINING	32	TL	L-5S	85	13.00/2.5	1675	500	575	8750
18.00-25 MINING	36	TL	L-5S	85	13.00/2.5	1675	500	625	9250
18.00-25 MINING	40	TL	L-5S	85	13.00/2.5	1675	500	700	9750
14.00-24 MINING	28	TTF	L-5S	63.5	10.0	1420	375	925	10000
12.00-24 MINING	24	TTF	L-5S	47 / 55 / 70	8.5	1300	333	1000	10250
12.00-20 MINING	20	TTF	L-5S	57	8.5	1145	315	900	6325
12.00-20 MINING	24	TTF	L-5S	45	8.5	1173	315	1000	6900
12.00-20 MINING	28	TTF	L-5S	67	8.5	1173	340	1030	8620
10.00-20 MINING	18	TTF	L-5S	58	7.5	1097	300	1000	7255
9.00-20 MINING	16	TTF	L-5S	55	7.0	1045	255	825	4750
8.25-15 MINING	24	TTF	L-5S	52	6.5	864	260	1030	4550
18.00-25 MINING	32	TL	L-4S	58	13.00/2.5	1675	500	575	8750
18.00-25 MINING	36	TL	L-4S	58	13.00/2.5	1675	500	625	9250
18.00-25 MINING	40	TL	L-4S	58	13.00/2.5	1675	500	700	9750
14.00-24 MINING	24	TTF	L-4S	45.5	10.0	1420	375	850	9500
10.00-20 MINING	16	TTF	L-4S	29 / 35	7.5	1058	278	790	5080
7.50-15 MINING	16	TTF	L-4S	25	6.00	820	220	1000	2975

GN616

Mining E-3



GN616+

Mining E-4



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
16.00-25 MINING	32	TTF/TL	E-3	32	11.25/2.0	1550	430	875	12500
16.00-25 MINING	36	TTF/TL	E-3	32	11.25/2.0	1550	430	975	13600
16.00-25 MINING	40	TTF/TL	E-3	32	11.25/2.0	1550	430	1075	14500
18.00-25 MINING	36	TTF/TL	E-4	57	13.00/2.5	1675	500	850	16000
18.00-25 MINING	40	TTF/TL	E-4	57	13.00/2.5	1675	500	950	17000
18.00-25 MINING	44	TTF/TL	E-4	57	13.00/2.5	1675	500	1050	18000
18.00-25 MINING	32	TTF/TL	E-3	32 / 36	13.00/2.5	1675	500	750	15000
18.00-25 MINING	36	TTF/TL	E-3	32 / 36	13.00/2.5	1675	500	850	16000
18.00-25 MINING	40	TTF/TL	E-3	32 / 36	13.00/2.5	1675	500	950	17000

GN617

Mining E-4/IND-3



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
8.25-16 MINING	18	TTF	E-4	32	6.50H	865	235	1000	4300
8.00-20 MINING	16	TTF	E-4	30	6.5	900	240	1200	4775
8.25-20 MINING	18	TTF	E-4	30	6.5	970	265	980	5280
10.00-20 MINING	18	TTF	E-4	40	7.5	1055	278	890	5470
11.00-20 MINING	18	TTF	E-4	33 / 40	8.0	1097	300	1200	5480
12.00-20 MINING	24	TTF	E-4	45	8.5	1145	325	1000	8180
14.00-24 MINING	36	TTF/TL	E-4		10.00/2.0	1370	375	925	10000
18.00-25 MINING	40	TTF/TL	E-4		13.00/2.5	1671	495	950	17000
18.00-25 MINING	48	TTF/TL	E-4		13.00/2.5	1671	495	1100	27600
24X12-12 MINING	24	TL	IND-3	20	9	625	295	1030	3130
28X12.5-15 MINING	28	TT	IND-3	26	9.75	711	305	1030	3355
32X12.5-15 MINING	24	TT	IND-3	27	9.75	826	310	1000	4150
32X14.5-15 MINING	24	TL	IND-3	27	11.5	838	355	1030	4945
36X12.5-20 MINING	28	TT	IND-3	33	11	915	320	1500	6875
40X12.5-20 MINING	32	TT	IND-3	33	11	1020	330	1500	7220
44X18-20 MINING	32	TL	IND-3	31.5	15	1130	478	1030	8480
45X16-20 MINING	36	TL	IND-3	47	15	1130	419	1030	10025
42X13-20 MINING	32	TT	IND-3	25	9	1067	330	1000	9070
42X13-20 MINING	24	TT	IND-3	25	9	1067	330	1000	8480
38X16-15 MINING	32	TL	IND-3	31	11.5	1000	396	1000	7800
60X25-25 MINING	52	TT	IND-3	45	19.5	1525	650	1800	33035
15L-10 MINING	24	TT	IND-3	24	13	704	366	860	3470
10.00L-15 MINING	24	TT	IND-3	28	7.5	917	284	1030	4875
10.00L-15 MINING	16	TT	IND-3	28	7.5	917	284	790	4235
14.50L-15 MINING	32	TL	IND-3	26	11.5	902	358	1030	6305
14.50L-15 MINING	28	TL	IND-3	26	11.5	902	358	1030	5580
14.50L-15 MINING	20	TT	IND-3	26	11.5	902	358	900	5130

GN615

Mining E-4



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
18.00-25 MINING	40	TL	E-4	68	13.00/2.5	1684	528	700	9750
18.00-33 MINING	40	TL	E-4	69	13.00/2.5	1860	509	700	11200

GN618

Mining E3



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
11.00-20 MINING	18	TTF	E-3	24	8.0	1105	293	910@50km/h	3650@50km/h
12.00-20 MINING	18	TTF	E-3	26	8.5	1145	325	810@50km/h	3750@50km/h
14.00-24 MINING	28	TTF/TL	E-3	27	10.00	1370	375	925	10000

GN619

Mining E-3



GN620

Mining E-3



GN621

Mining E-3



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @40km/h	最大负荷 Max Load (KG) @40km/h
12.00-20 MINING	18	TTF	GN619	E-3	21	8.5	1145	315	810
12.00-20 MINING	20	TTF	GN619	E-3	21	8.5	1145	315	880
12.00-20 MINING	20	TTF	GN621	E-3	29	8.0	1130	310	790
12.00-24 MINING	18	TTF	GN619	E-3	21	8.5	1247	315	810
12.00-24 MINING	20	TTF	GN619	E-3	21	8.5	1247	315	1000
13.00-25 MINING	28	TTF	GN621	E-3	26	8.5	1297	307	700
13.00-25 MINING	28	TTF/TL	GN619	E-3		10.0	1300	350	870@10km/h
14.00-20 MINING	20	TTF	GN619	E-3	25	10.0	1265	375	770
14.00-20 MINING	24	TTF	GN619	E-3	25	10.0	1265	375	850@10km/h
14.00-20 MINING	28	TTF	GN621	E-3	27	10.0	1265	375	930
14.00-24 MINING	24	TTF/TL	GN619,GN620	E-3	27	10.00/2.0	1370	375	850@10km/h
14.00-24 MINING	28	TTF/TL	GN619,GN620	E-3	27	10.00/2.0	1370	375	925@10km/h
14.00-25 MINING	36	TTF/TL	GN621	E-3	27	10.00/2.0	1370	375	1200@10km/h

GN630

Mining E-4/L-4/L-5



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
23.5-25 MINING	20	TTF/TL	GN630 L-4	33	19.50/2.5	1675	595	375	10900
26.5-25 MINING	40	TTF/TL	GN630 E-4		22.00/3.0	1800	675	625	18000
12.00-20 MINING	24	TTF	GN630 L-5	61	8.5	1145	315	1000	8180
12.00-20 MINING	28	TTF	GN630 L-5	61	8.5	1145	315	1030	8620
12.00-24 MINING	24	TTF	GN630 E-4	45	8.5	1247	315	1000	8700
14.00-24 MINING	36	TTF/TL	GN630 E-4		10.00W	1370	375	925	10000

14.00-25 MINING	40	TTF	GN630 E-4	45 / 51	10.00/2.0	1370	375	1200	11500
18.00-25 MINING	40	TTF/TL	GN630 E-4		13.00/2.5	1671	495	950	17000
18.00-25 MINING	48	TTF/TL	GN630 E-4		13.00/2.5	1671	495	1100	27600
18.00-33 MINING	36	TTF	GN630 E-4	54	13.00/2.5	1875	500	850	10600
18.00-33 MINING	40	TTF	GN630 E-4	54	13.00/2.5	1875	500	950	11100
21.00-33 MINING	32	TL	GN630 E-4	42.5	15.00/3.0	1960	575	500@50km/h	10300@50km/h
21.00-33 MINING	36	TL	GN630 E-4	42.5	15.00/3.0	1960	575	575@50km/h	11200@50km/h
21.00-35 MINING	36	TL	GN630 E-4	54	15.00/3.0	2050	570	750	23000
21.00-35 MINING	40	TL	GN630 E-4	54	15.00/3.0	2050	570	825	24300
24.00-35 MINING	42	TL	GN630 E-4	57	17.00/3.5	2175	655	750	29000
24.00-35 MINING	48	TL	GN630 E-4	57	17.00/3.5	2175	655	850	31500
24.00-49 MINING	42	TL	GN630 E-4	57	17.00/3.5	2530	655	750	34500
24.00-49 MINING	48	TL	GN630 E-4	57	17.00/3.5	2530	655	850	37500
27.00-49 MINING	42	TL	GN630 E-4	40	19.50/4.0	2700	735	675	40000
27.00-49 MINING	48	TL	GN630 E-4	40	19.50/4.0	2700	735	775	43750
27.00-49 MINING	42	TL	GN630 E-4	63.5	19.50/4.0	2700	735	675	40000
27.00-49 MINING	48	TL	GN630 E-4	63.5	19.50/4.0	2700	735	775	43750
30.00-51 MINING	46	TL	GN630 E-4	43	22.00/4.5	2905	825	650	48700
30.00-51 MINING	52	TL	GN630 E-4	43	22.00/4.5	2905	825	750	53000
30.00-51 MINING	46	TL	GN630 E-4	69.5	22.00/4.5	2905	825	650	48750
30.00-51 MINING	52	TL	GN630 E-4	69.5	22.00/4.5	2905	825	750	53000
33.00-51 MINING	50	TL	GN630 E-4	80	24.00/5.0	3060	895	650	56000
33.00-51 MINING	58	TL	GN630 E-4	80	24.00/5.0	3060	895	750	61500
36.00-51 MINING	50	TL	GN630 E-4	82	26.00/5.0	3235	990	600	65000
36.00-51 MINING	58	TL	GN630 E-4	82	26.00/5.0	3235	990	675	71000
37.00-57 MINING	68	TL	GN630 E-4	60	27.00/6.0	3440	1015	525@50km/h	46250@50km/h
40.00-57 MINING	60	TL	GN630 E-4	95	29.00/6.0	3595	1095	650	87500
40.00-57 MINING	68	TL	GN630 E-4	95	29.00/6.0	3595	1095	725	92500
53/80-63 MINING	80	TL	GN630 E-4	95	29.00/6.0	3780	1345	750	123500

GN637

Mining E-3/E-4



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
6.50-16 MINING	12	TTF	E-3	14.5 / 17	5.50F	750	185	630 / 730	1060 / 1320
7.00-16 MINING	14	TTF	E-3	15.5 / 17 / 21	5.50F	775	200	730	1320
7.50-16 MINING	14	TTF	E-3	17	6.00G	805	215	730	1500
7.50-16 MINING	16	TTF	E-3	22	6.00G	816	215	830	1650
8.25-16 MINING	16	TTF	E-3	18	6.50H	885	235	730	1800
8.25-16 MINING	16	TTF	E-3	23	6.50H	840	235	925	2520
9.00-20 MINING	16	TTF	E-3	24	7.0	1018	259	880	2900
9.00-20 MINING	18	TTF	E-3	26	7.0	1038	259	910	3000
10.00-20 MINING	16	TTF	E-3	28	7.5	1073	278	810	3000
10.00-20 MINING	18	TTF	E-3	28	7.5	1073	278	910	3350
11.00-20 MINING	18	TTF	E-3	30	8.0	1105	293	910	3650
12.00-20 MINING	18	TTF	E-3	26.5	8.5	1145	315	810	3750
12.00-20 MINING	20	TTF	E-3	28	8.5	1145	315	880	4000
12.00-24 MINING	20	TTF	L-4	35	8.5	1275	315	880	4500
12.00-24 MINING	24	TTF	L-4	35	8.5	1275	315	1000	4790
13.00-25 MINING	36	TTF	E-3	27	8.5	1300	350	1200	10600
14.00-20 MINING	28	TTF	E-3	28	10.00	1370	375	890	8500
14.00-24 MINING	32	TTF/TL	E-3	28	10.00	1370	375	1200	11500
14.00-24 MINING	36	TTF/TL	E-3	28	10.00	1370	375	1050	10900
14.00-25 MINING	36	TTF	E-3	30.5	10.00/2.0	1370	375	1200	11500
14.00-25 MINING	40	TTF/TL	E-3	28 / 32	10.00/2.0	1370	375	1200	11500



GN601

Port IND-3 / E-3 / L-3



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
16.00-25 PORT	36	TL	IND-3 / E-3	28	11.25/2.0	1495	430	1150	18400
18.00-25 PORT	40	TL	IND-3 / E-3		13.00/2.5	1615	500	950	17000
21.00-25 PORT	48	TL	IND-3 / E-3	32	15.00/3.0	1750	570	1250	29950
26.5-25 PORT	40	TTF/TL	IND-3 / L-3		22.00/3.0	1800	675	550	17000

GN610

Port IND-4S / L-4S / L-5S



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
18.00-25 PORT	40	TL	IND-4S / L-4S	58	13.00/2.5	1675	526	1150	22950
18.00-33 PORT	40	TL	IND-4S / L-4S	58	13.00/2.5	1860	509	1150	26700
10.00-20 PORT	18	TTF	L-5S	58	7.5	1097	300	1000	7255
12.00-20 PORT	28	TTF	L-5S	67	8.5	1173	330	1150	10250
12.00-24 PORT	24	TTF	L-5S	55	8.5	1300	333	1000	10250
14.00-24 PORT	28	TTF/TL	L-5S	77	10.00	1417	386	1000	13500
14.00-25 PORT	28	TTF/TL	L-5S	77	10.00	1417	386	1000	13500
18.00-25 PORT	40	TL	L-5S	85	13.00/2.5	1675	538	1150	22950
21.00-25 PORT	40	TL	L-5S	97	15.00/3.0	1798	617	1150	27290

GN615

Port IND-3 / IND-4 / E-3 / E-4



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
18.00-25 PORT	40	TL	IND-3 / E-3	41	13.00/2.5	1636	510	1150	22950
18.00-25 PORT	44	TL	IND-3 / E-3	41	13.00/2.5	1636	510	1250	24110
18.00-25 PORT	40	TL	IND-4 / E-4	68	13.00/2.5	1684	528	1150	22950
18.00-33 PORT	40	TL	IND-4 / E-4	69	13.00/2.5	1860	509	1150	26700
21.00-25 PORT	42	TL	IND-3 / E-3	42	15.00/3.0	1750	570	1150	28000
21.00-25 PORT	44	TL	IND-3 / E-3	42	15.00/3.0	1750	570	1250	29950
21.00-25 PORT	48	TL	IND-3 / E-3	42	15.00/3.0	1750	570	1250	32030
21.00-35 PORT	44	TL	IND-3 / E-3	42	15.00/3.0	2005	570	1150	34420

GN616

Port IND-3 / IND-4 / E-4



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @10 & 50km/h	最大负荷 Max Load (KG) @10 & 50km/h
12.00-24 PORT	28	TTF/TL	IND-4 / E-4	-- / 40	8.5	1245	315	950 / ---	9900 / ----
14.00-24 PORT	36	TTF/TL	IND-4 / E-4	-- / 60	10.00	1370	375	925 / ---	10000 / ----
16.00-25 PORT	36	TTF/TL	IND-4 / E-4	32	11.25/2.0	1550	430	975 / 725	13600 / 7750
16.00-25 PORT	40	TTF/TL	IND-4 / E-4	32	11.25/2.0	1550	430	1075 / 800	14500 / 8200
18.00-25 PORT	32	TTF/TL	IND-4 / E-4	32 / 36	13.00/2.5	1675	500	750 / 575	15000 / 8750
18.00-25 PORT	36	TTF/TL	IND-4 / E-4	32 / 36	13.00/2.5	1675	500	850 / 625	16000 / 9250
18.00-25 PORT	40	TTF/TL	IND-4 / E-4	32 / 36	13.00/2.5	1675	500	950 / 700	17000 / 9750
16.00-25 PORT	32	TTF/TL	IND-3	32	11.25/2.0	1550	430	875 / 650	12500 / 7300
16.00-25 PORT	36	TTF/TL	IND-3	32	11.25/2.0	1550	430	975 / 725	13600 / 7750
16.00-25 PORT	40	TTF/TL	IND-3	32	11.25/2.0	1550	430	1075 / 800	14500 / 8200
18.00-25 PORT	32	TTF/TL	IND-3	32 / 36	13.00/2.5	1675	500	750 / 575	15000 / 8750
18.00-25 PORT	36	TTF/TL	IND-3	32 / 36	13.00/2.5	1675	500	850 / 625	16000 / 9250
18.00-25 PORT	40	TTF/TL	IND-3	32 / 36	13.00/2.5	1675	500	950 / 700	17000 / 9750
18.00-25 PORT	40	TTF/TL	IND-4 / E-4	70	13.00/2.5	1675	500	950 / 700	17000 / 9750
21.00-25 PORT	48	TL	IND-4 / E-4	52	15.00/3.0	1750	570	1100 / ---	30000 / ----
24.00-49 PORT	42	TL	IND-3	36	17.00/3.5	1975	650	900 / ---	32600 / ---
26.5-25 PORT	40	TTF/TL	IND-4 / E-4		22.00/3.0	1800	675	625 / ---	18000 / ----

GN617

Port IND-4 / E-4



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
10.00-20 PORT	18	TTF/TL	IND-4 / E-4	40	7.5	1065	280	1000	7255
12LL610 PORT	24	TTF/TL	IND-4 / E-4	52	8.5	1173	340	1000	9800
12.00-20 PORT	24	TTF/TL	IND-4 / E-4	45	8.5	1173	340	1000	9800
12.00-24 PORT	24	TTF/TL	IND-4 / E-4	54	8.5	1300	333	1000	10250
14.00-24 PORT	28	TTF/TL	IND-4 / E-4	57	10.0	1417	386	1000	13500
14.00-24 PORT	32	TTF/TL	IND-4 / E-4	57	10.0	1417	386	1100	14700
14.00-25 PORT	28	TTF/TL	IND-4 / E-4	57	10.0	1417	386	1000	13500
14.00-25 PORT	32	TTF/TL	IND-4 / E-4	57	10.0	1417	386	1100	14700
16.00-25 PORT	28	TTF/TL	IND-4 / E-4	62	11.25/2.0	1548	432	900	15525
16.00-25 PORT	32	TTF/TL	IND-4 / E-4	62	11.25/2.0	1548	432	1000	16600
16.00-25 PORT	36	TTF/TL	IND-4 / E-4	62	11.25/2.0	1548	432	1150	18400
18.00-25 PORT	40	TTF/TL	IND-4 / E-4	69	13.00/2.5	1675	526	1050	18000
18.00-25 PORT	44	TTF/TL	IND-4 / E-4	69	13.00/2.5	1675	526	1150	22950

GN630

Port IND-4 / E-4



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
12.00-24 PORT	24	TTF	IND-4 / E-4	45	8.5	1275	315	1000	10250
14.00-24 PORT	28	TTF/TL	IND-4 / E-4	51	10.00	1370	375	1000	13500
18.00-25 PORT	36	TL	IND-4 / E-4	54	13.00/2.5	1675	500	850	16000
18.00-25 PORT	40	TL	IND-4 / E-4	54	13.00/2.5	1675	500	950	17000
18.00-25 PORT	40	TL	IND-4 / E-4	56	13.00/2.5	1675	515	1150	22950

GN637

Port IND-3 / E-3



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
14.00-24 PORT	32	TTF/TL	IND-3 / E-3	28	10.00	1370	375	1100	14700

GN616

Port IND-4 / E-4



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA) @25km/h	最大负荷 Max Load (KG) @25km/h
12.00-24 PORT	24	TTF	IND-4 / E-4	43	8.5	1245	315	975	7500
14.00-24 PORT	28	TTF/TL	IND-4 / E-4	53	10.00/2.0	1370	375	925	10000
14.00-24 PORT	32	TTF/TL	IND-4 / E-4	53	10.00/2.0	1370	375	1050	10900
18.00-25 PORT	40	TL	IND-4 / E-4	68	13.00/2.5	1615	500	950	17000



QUAY OPERATIONS




CRANE
OPERATIONS



YARD OPERATIONS



GATE OPERATIONS

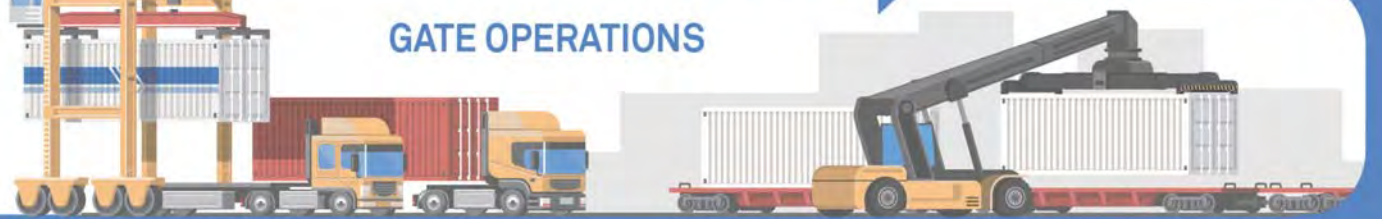



工业车辆轮胎 Industrial Vehicle Tire



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth (mm)	标准轮辋 Standard Rim	外直径 O.D. (mm)	断面宽 S.W. (mm)	气压 Inflated Pressure (KPA) CB Forklift@25km/h Drive / Steer	最大负荷 Max Load (KG) CB Forklift@25km/h Drive / Steer
4.00-8 NHS	8	TTF	GN101	13	3.00D	415	112	930	745 / 630
5.00-8 NHS	10	TTF	GN101	10 / 14	3.50D	470	137	1000	1150 / 970
5.00-8 NHS	10	TTF	GN102	16	3.50D	470	137	1000	1150 / 970
5.00/5.70-8 NHS	10	TTF	GN101 IND-4	23	3.50D	470	137	1000	1150 / 970
16x6-8 NHS	10	TTF	GN102	13	4.33R	425	152	860	1085 / 920
18x7-8 NHS	14	TTF	GN101	13 / 16	4.33R	465	173	970	1505 / 1270
18x7-8 NHS	16	TTF	GN102	18	4.33R	465	173	1000	1695 / 1450
6.00-9 NHS	10	TTF	GN101	11.5 / 16	4.00E	540	160	860	1505 / 1275
6.00-9 NHS	12	TTF	GN102	18	4.00E	540	160	1030	1675 / 1415
6.00/6.90-9 NHS	12	TTF	GN101 IND-3	17	4.00E	540	160	1030	1675 / 1415
6.00/6.90-9 NHS	12	TTF	GN101 IND-4	26	4.00E	540	160	1030	1675 / 1415
7.00-9 NHS	10	TTF	GN101	14	5.00S	590	190	860	1995 / 1685
7.00-9 NHS	10	TTF	GN102	19	5.00S	590	190	860	1995 / 1685
21x8-9 NHS	14	TTF	GN101,GN102	16	6.00E	535	200	1000	2040 / 1725
23x9-10 NHS	16	TTF	GN101	16 / 20	6.50F	595	225	1030	2810 / 2370
6.50-10 NHS [★]	10	TTF	GN101	14 / 17	5.00F	590	175	790	1655 / 1400
6.50-10 NHS	12	TTF	GN101 IND-4	24 / 31.5	5.00F	590	175	1000	1895 / 1600
6.50-10 NHS	12	TTF	GN102	21 / 37	5.00F	590	175	1000	1895 / 1600
7.50-10 NHS	16	TTF	GN101	22	5.50F	645	205	1030	2665 / 2245
7.00-12 NHS [★]	14	TTF	GN101	15 / 18	5.00S	676	190	1000	2590 / 2190
7.00-12 NHS	14	TTF	GN101 IND-4	32.5	5.00S	676	190	1000	2590 / 2190
7.00-12 NHS	14	TTF	GN102	20	5.00S	676	190	1000	2590 / 2190
8.25-12 NHS	12	TTF	GN101,GN102	17	6.5	765	235	720	3060 / 2585
23x10-12 NHS	16	TTF	GN101	20	8.00G	597	254	970	3220 / 2720
27x10-12 NHS	16	TTF	GN101	16 / 23	8.00	690	255	1000	3585 / 3030
250-15 NHS	18	TTF	GN101	20	7.5	735	250	1030	4110 / 3470
250-15 NHS	20	TTF	GN101 IND-4	28.5	7.5	735	250	1030	4580 / 3755
300-15 NHS [★]	20	TTF	GN101,GN102	23	8.0	840	300	930	5940 / 4990
300-15 NHS	22	TTF	GN101 IND-4	29.5	8.0	840	300	1030	7155 / 5865
7.00-15 NHS	14	TTF	GN101,GN102	20	5.5	750	200	1000	3140 / 2655
7.00-15 NHS	14	TTF	GN101 IND-4	33	5.5	750	200	1000	3140 / 2655
7.50-15 NHS	14	TTF	GN101	20	6.0	780	215	925	3375 / 2840
8.25-15 NHS [★]	16	TTF	GN101	18	6.5	840	235	925	4050 / 3450
8.25-15 NHS	18	TTF	GN101 IND-4	32	6.5	840	235	1000	4240 / 3600
8.25-15 NHS	16	TTF	GN102	22	6.5	840	235	1000	4240 / 3600
28x9-15(8.15-15)NHS [★]	16	TTF	GN101	18	7.00	710	220	1000	3115 / 2630
28x9-15(8.15-15)NHS	16	TTF	GN101 IND-4	27.5	7.00	710	220	1000	3115 / 2630
28x9-15(8.15-15)NHS	16	TTF	GN102	21	7.00	710	220	1000	3115 / 2630
7.50-16 NHS	16	TTF	GN101	17 / 20	6.00G	805	215	1030	5440 / 4460
7.50-16 NHS	16	TTF	GN101 IND-4	28	6.00G	805	215	1030	5440 / 4460
8.25-20 NHS [★]	14	TTF	GN101,GN102	21	6.5	974	235	830	4575 / 3865
8.25-20 NHS	18	TTF	GN101 IND-4	32	6.5	974	235	950	5300 / 4345
9.00-20 NHS	16	TTF	GN101,GN102	23 / 26 / 30	7.0	1018	259	860	5595 / 4725
9.00-20 NHS	18	TTF	GN101 IND-4	36	7.0	1018	259	960	6020 / 5050
10.00-20 NHS	18	TTF	GN101 IND-4	28 / 34 / 40	7.5	1055	278	890	6475 / 5470
11.00-20 NHS	16	TTF	GN101 IND-4	36	8.0	1085	293	760	6405 / 5405
12.00-20 NHS	20	TTF	GN101 IND-3	25 / 29	8.5	1125	315	900	7400 / 6325
12.00-20 NHS	20	TTF	GN101 IND-4	38 / 45	8.5	1125	315	900	7400 / 6325
12.00-24 NHS	18	TTF	GN101 IND-4	38	8.5	1225	315	830	8635 / 7290
14.00-24 NHS	20	TTF	GN101 IND-4	38	10.0	1343	375	720	10910 / 9215
14.00-24 NHS	24	TTF	GN101 IND-4	38	10.0	1343	375	860	12080 / 10205
355/65-15 NHS	28	TTF	GN101 IND-3	23	9.75	841	350	1000	6000 / —
355/65-15 NHS	32	TTF	GN101 IND-3	23	9.75	841	350	1300	7500 / —
14.00-25 NHS	28	TTF	GN101 IND-4	40	10.00/1.5	1370	375	925	13500 / 11000

Note: [★]—Mining type can be produced

GN701

R-4



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D. (mm)	断面宽 S.W. (mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
10.5/80-18 NHS	10	TL	R-4	22	9	900	274	370	1935
12.5/80-18 NHS	12	TL	R-4	22	9	965	308	310	2375
15.5/80-24 NHS (400/80-24)	24	TL	R-4	29	DW13	1250	404	750	5700
16.9-24 NHS	12	TL	R-4	25	W15L	1335	430	260	2610
16.9-28 NHS	12	TL	R-4	26	W15L	1435	430	260	2690
18.4-26 NHS	12	TL	R-4	27	DW16	1450	467	230	2985
17.5L-24 NHS	10	TL	R-4	26	W15L	1265	445	190	1725
19.5L-24 NHS	12	TL	R-4	28	DW16	1340	495	210	2145
21L-24 NHS	12	TL	R-4	29	DW18	1400	533	190	2410
21L-24 NHS	16	TL	R-4	32	DW18	1400	533	250	2795

GN702

R-4



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D. (mm)	断面宽 S.W. (mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
10.5/80-18 NHS	10	TL	R-4	22	9	900	274	370	1935
12.5/80-18 NHS	12	TL	R-4	26	9	965	308	370	2625
8.25-16 NHS	16	TTF	R-4	20	6.50H	835	235	730	1800

GN703

R-1



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D. (mm)	断面宽 S.W. (mm)	气压 Inflated Pressure (KPA)	最大负荷 Max Load (KG) @10 & 40km/h
20.5/70-16 NHS	14	TTF	R-1	25	10.00G / W11	865	310	390	--- / 1600
23.5/70-16 NHS	14	TTF	R-1		W11	910	335	390	--- / 1600
26x12.00-12 NHS	8	TL	R-1	19	10.50	670	309	290	1370 / ---
29x12.50-15 NHS	8	TL	R-1	21.5	10.00	770	325	320	1950 / ---
31x15.50-15 NHS	8	TL	R-1	19	13.00	802	402	310	1980 / ---
18-19.5 NHS	18	TL	R-1	24	14	1105	460	725	--- / 5460
10.0/75-15.3 NHS	12	TL	R-1	20	9	775	264	470	--- / 1600
11.5/80-15.3 NHS	14	TL	R-1	20	9	869	290	470	--- / 2310
12.5/80-15.3 NHS	16	TL	R-1	20	9	925	307	490	--- / 2985

16/70-16 NHS	14	TTF	R-1	25	10.00G	870	260	320	--- / 1425
16/70-20 NHS (405/70-20)	14	TTF/TL	R-1,R-4	30 / 35	13	1075	410	350	5000 / 3250
16/70-24 NHS (405/70-24)	14	TTF/TL	R-1,R-4	30 / 35	13	1175	410	350	5000 / 3250
15.5/80-24 NHS (400/80-24)	12	TL	R-4	35	13	1280	382	300	2900 / ---

GN708

R-1



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	标准轮辋 Standard Rim	外直径 O.D. (mm)	断面宽 S.W. (mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
12.5/80-18 NHS	12	TL	R-4	W9	987	308	370	1850
12.5/80-18 NHS	14	TL	R-4	W9	987	308	430	2120

GN633

SEMI-SOLID



规格 Tire Size	层级 PR	类型 TTF/TL	花纹深度 Pattern Depth(mm)	花纹代码 Pattern	标准轮辋 Standard Rim	外直径 O.D. (mm)	断面宽 S.W. (mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
16/70-16 NHS	16	TTF	45	SEMI-SOLID	10.00G	910	335	325	2700
20.5/70-16 NHS	16	TTF	45	SEMI-SOLID	10.00G	910	335	350	2850
16/70-20 NHS	14	TTF/TL	45	SEMI-SOLID	13(SDC)	1150	410	450	5100
16/70-20 NHS	18	TTF/TL	45	SEMI-SOLID	13(SDC)	1150	410	550	5800
16/70-24 NHS	14	TTF/TL	45	SEMI-SOLID	13(SDC)	1175	410	450	5600

GN636

G-2/L-2/R-4



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D. (mm)	断面宽 S.W. (mm)	气压 Inflated Pressure (KPA)	最大负荷 Max Load (KG) @10 & 40km/h
8.25-20 NHS	14	TTF	G-2/L-2	19	6.5	974	235	830	3865 / 2440
9.00-20 NHS	14	TTF	G-2/L-2	18 / 24	7.0	1038	259	760	3900 / 2575
9.00-20 NHS	16	TTF	G-2/L-2	18 / 24	7.0	1038	259	860	4725 / 2900
10.00-20 NHS	14	TTF	G-2/L-2	21 / 25	7.5	1073	278	690	4250 / 2800
10.00-20 NHS	16	TTF	G-2/L-2	21 / 25	7.5	1073	278	790	4695 / 2965
11.00-20 NHS	16	TTF	G-2/L-2	22	8.0	1085	293	760	5405 / 3415
405/70-20 NHS (16/70-20)	14	TTF/TL	R-4	37	13	1076	407	400	5000 / 3250
405/70-24 NHS (16/70-24)	14	TTF/TL	R-4	37	13	1178	407	400	5000 / 3250



SKS-1
 SKS-2
 SKS-3
 SKS-4



SKS-5
 SKS-6
 SKS-7

规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D. (mm)	断面宽 S.W. (mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
10-16.5 NHS	10 / 12	TL	SKS-1,6	18	8.25	773	264	520 / 620	2135 / 2375
10-16.5 NHS	10 / 12	TL	SKS-2	18 / 26	8.25	773	264	520 / 620	2135 / 2375
10-16.5 NHS	10 / 12	TL	SKS-3,5(L-5)	35 / 42	8.25	790	268	520 / 620	2135 / 2375
10-16.5 NHS	10 / 12	TL	SKS-4	18 / 30	8.25	773	264	520 / 620	2135 / 2375
10-16.5 NHS	10 / 12	TL	SKS-7	18 / 34 / 40	8.25	773	264	520 / 620	2135 / 2375
12-16.5 NHS	12 / 14	TL	SKS-1	18 / 22	9.75	831	307	550 / 620	2865 / 3075
12-16.5 NHS	12 / 14	TL	SKS-2	18 / 32	9.75	831	307	550 / 620	2865 / 3075
12-16.5 NHS	12 / 14	TL	SKS-3,5(L-5)	35 / 43	9.75	836	315	550 / 620	2865 / 3075
12-16.5 NHS	12 / 14	TL	SKS-4	18 / 30 / 35	9.75	831	307	550 / 620	2865 / 3075
12-16.5 NHS	12 / 14	TL	SKS-6	18 / 25	9.75	831	307	550 / 620	2865 / 3075
12-16.5 NHS	12 / 14	TL	SKS-7	18 / 34 / 40	9.75	831	307	550 / 620	2865 / 3075
14-17.5 NHS	14	TL	SKS-1	19 / 22 / 26 / 33	10.5	921	349	550	3875
14-17.5 NHS	14	TL	SKS-3(L-5)	30 / 38.5	10.5	932	358	550	3875
14-17.5 NHS	14	TL	SKS-4	30	10.5	921	349	550	3875
14-17.5 NHS	14	TL	SKS-6	19 / 22	10.5	921	349	550	3875
14-17.5 NHS	14	TL	SKS-7(L-5)	40	10.5	945	349	550	3875
15-19.5 NHS	14	TL	SKS-1	21 / 26	11.75	389	1019	485	4565
15-19.5 NHS	14	TL	SKS-6	20 / 23	11.75	389	1019	485	4565
23x8.5-12 NHS	8	TL	SKS-1,6	13	7.00	574	213	450	975
23x8.5-15 NHS	10	TL	SKS-1		7.00	645	225	400	960
26x12.00-12 NHS	8	TL	R-1	19	10.50	670	309	290	1370
26x12.00-12 NHS	12	TL	SKS-1	27	10.50	670	300	520	1940
27x8.5-15 NHS	8	TL	SKS-1,6	14	7.00	678	213	410	1305
27x8.5-15 NHS	10	TL	SKS-5(L-5)	33	7.00	686	221	550	1460
27x10-12 NHS	14	TL	SKS-1	19	8.00G	690	255	700@25km/h	2725@25km/h
27x10.5-15 NHS	8	TL	SKS-1,6	16	8LB / 8.5	691	259	410	1405
29x12.5-15 NHS	8	TL	R-1	21.5	10.00	770	325	320	1950
31x15.50-15 NHS	8	TL	R-1	19	13.00	802	402	310	1980
31x15.50-15 NHS	12	TL	SKS-1	26	13.00	802	402	415	2100
33x15.50-16.5 NHS	14	TL	SKS-1	20	12	831	389	410	3100
16.9-24 NHS	14	TL	SKS-3,4	24	W15L	1335	430	260	2610
16.9-28 NHS	14	TL	SKS-3,4,5	24	W15L	1435	430	300	4840
11L-16 NHS	12	TL	SKS-1	16	8LB/W8L	835	280	440	1250
11L-16 NHS	14	TL	SKS-2	19	8LB/W8L	845	280	470	1550
11L-16 NHS	12	TL	SKS-3(L-5)	22	8LB/W8L	835	280	440	1550
19.5L-24 NHS	12	TL	SKS-3,4	28	DW16	1340	495	210	2145
19.5L-24 NHS	16	TL	SKS-3,4	29 / 43	DW17L	1340	495	300	4135
21L-24 NHS	16	TL	SKS-4	28	DW18	1450	576	250	2795

5.70-12 NHS	6	TL	SKS-1,6	14	4.5	570	146	520	750
5.70-12 NHS	8	TL	SKS-5(L-5)	20	4.5	570	146	620	850
5.90-15 NHS	8	TL	SKS-5(L-5)	26	5.00	686	152	620	950
7.00-15 NHS	8	TL	SKS-1	17	5.5	750	200	520	1650
9.00-16 NHS	12	TL	SKS-1		6.5	920	230	520	3035
12.5/70-16 NHS	8	TL	SKS-1		10.0	848	316	260	1645
12.5/70-16 NHS	16	TL	SKS-6		12.00/1.3	1275	395	525	6500
12.5/80-18 NHS	12	TL	SKS-4,5,6	29	9.0	990	310	310	2375
12.5/80-18 NHS	16	TL	SKS-3(L-5)	29 / 36	9.0	990	310	490	3130
15.5/60-18 NHS	10	TL	SKS-6		8.25	1330	410	520	2170
16/70-16 NHS	14	TTF	SKS-3	25	10.00G	870	260	280	1425
20.5/70-16 NHS	14	TTF	SKS-3	25	10.00G	910	335	280	1600
17.5/65-20 NHS	14	TL	SKS-1		14	1094	448	240	3195
17.5-25 NHS	16	TTF/TL	SKS-4	28	14.00/1.5	1350	445	475	7300
17.5-25 NHS	20	TTF/TL	SKS-4	28	14.00/1.5	1350	445	575	8250

GN622
 E-7



规格 Tire Size	层级 PR	类型 TT/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D. (mm)	断面宽 S.W. (mm)	气压 Inflated Pressure (KPA) @8km/h & 65km/h	最大负荷 Max Load (KG) @8km/h & 65km/h
9.00-16 SAND-NHS	8	TT/TL	E-7	10	6.5H	860	245	245	1700 / 975
9.00-17 SAND-NHS	8	TT/TL	E-7	10	7J	910	230	245	1750 / 1000
14.00-20 SAND-NHS	18	TT/TL	E-7		10.00W	1220	375	245	4125 / 2360
16.00-20 SAND	16	TT/TL	E-7		10.00W	1370	420	245	5450 / 3150
18-20 SAND	14	TT/TL	E-7	15	14.00T	1090	455	360@50km/h	4625@50km/h
20-20 SAND	16	TL	E-7	15	14.00T	1180	505	360@50km/h	6000@50km/h
22-20 SAND	14	TL	E-7	15	17.00	1075	555	280@50km/h	4125@50km/h

GN623
 E-2

GN624
 E-7



规格 Tire Size	层级 PR	类型 TT/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D. (mm)	断面宽 S.W. (mm)	气压 Inflated Pressure (KPA)	最大负荷 Max Load (KG)
66x43.00-25 SAND	20	TL	GN623 E-2	47	36.0TH	1650	1054	345	10000
66x43.00-25 SAND	24	TL	GN623 E-2	47	36.0TH	1650	1054	380	8800
66x44.00-25 SAND	20	TL	GN624 E-7	10	36.0TH	1702	1118	345	7020
66x44.00-25 SAND	24	TL	GN624 E-7	10	36.0TH	1702	1118	380	10000
66x44.00-25 SAND	32	TL	GN624 E-7	16	36.0TH	1702	1118	480	11185



机场设备用轮胎 Airport Equipments Tire



GN625A GN625B GN626C GN627D GN627H



GN628E GN628F GN629G GN630K

规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	标准轮辋 Standard Rim	外直径 O.D.(mm)	断面宽 S.W.(mm)	气压 Inflated Pressure (KPA)	最大负荷 Max Load (KG)
1200X500-508 (500/70-20)	16	TTF	E-2B	388X508	1200	500	500	4400
1300X530-533 (530/70-21)	16	TTF	E-2A	440X533	1300	530	475	4500
(1666x506-610) 18.00-24	24	TTF	E-2A	13.00	1600	500	530	8200
1500X600-635	22	TTF	E-2A	500X635	1500	600	380	7050
1025x420-425	16	TTF	E-2C	330-462	1025	420	650	3250
1150X400-457	18	TL	E-2C	13.00	1160	450	350	2100
13.00-18(340-457)	10	TTF/TL	E-2C	9.00	1110	340	280	2140
12.00-18(320-457)	14	TTF	E-2D,K	8.00	1070	290	280	1630
14.00-20(370-508)	20	TTF	E-2D	10.00	1270	370	770	5150
16.00-20	20	TTF	E-2B	10.00	1384	460	500	5000
425/85-21	22	TTF	E-2E	12.00	1270	410	850	6500
1100X400-433	18	TTF	E-2F	310X533	1100	400	475	3875
1220X400-533 (400/80-21)	16	TTF	E-2F	311X533	1200	400	320	2800
1350X550-533 (550/75-21)	10	TT	E-2F	440-533	1350	550	650	6300
12.00-20(320-508)	20	TTF	E-2D	8.50	1120	310	890	4250
15.5-20 (335/80-20)	22	TTF	E-2G	18.00	1310	405	700	5600
15.00-21	16	TTF	E-2G	11.25	1313	406	470	3875
12.5-20	16	TTF/TL	E-2D	11	1145	370	500	2575
13-20	16	TTF	E-2D,H	11	1205	395	425	3750
16.00-24	16	TTF	E-2D,H	11.25	1495	430	325	4500

GN201



GN202



规格 Tire Size	层级 PR	类型 TTF/TL	花纹代码 Pattern	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D. (mm)	断面宽 S.W. (mm)	气压 Inflated Pressure (KPA) @10km/h	最大负荷 Max Load (KG) @10km/h
390X125-178	12	TL	GN201		4.00E	390	125	200	530
500X180-250G-IV	12	TL	GN201			500	180	686	600
165-13	10	TL	GN202	21.5	4 1/2J	608	177	655	1050
185-14	10	TL	GN202	20	5.50F	655	200	655	1120

GN203



规格 Tire Size	层级 PR	类型 TTF/TL	花纹深度 Pattern Depth(mm)	标准轮辋 Standard Rim	外直径 O.D. (mm)	断面宽 S.W. (mm)	气压 Inflated Pressure (KPA)	最大负荷 Max Load (KG)
4.80/4.00-8	8	TL	13	3.75	432	124	790	525
5.70/5.00-8	8	TL	12.5	3.75	480	146	790	830
6.90-9	8	TL	13	4.00E	558	175	690	1125
6.90-9	10	TT/TL	18	4.00E	558	175	860	1280
6.50-10	12	TT	18	5.00F	615	200	970	1150
7.50-10	10	TT	16	5.50F	647	203	690	2305
7.50-10	16	TT	16	5.50F	647	203	1030	2925
225/75-15	10	TL	19	6.00	750	224	725	1635
225/75D16	10	TL	19	6.00	750	224	7901	1605
8.00-16.5	8	TL	14	6.00	726	203	450	1205
8.75-16.5	10	TL	19	6.75	772	225	520	1410
9.50-16.5	10	TL	18	6.75	780	241	550	1440

